

DUROFIRE

www.durofire.com



WIRE MESH CABLE TRAY



INDEX

BRIEF INTRODUCTION

PAGES 01 - 02

WIRE MESH CABLE TRAY

PAGES 03 - 20

SPLICING

PAGES 21 - 26

WALL MOUNTING

PAGES 27 - 30

CEILING MOUNTING

PAGES 31 - 35

UNDERFLOOR MOUNTING


PAGES 36 - 38

OTHER

PAGES 39

FABRICATIONS

PAGES 40 - 52

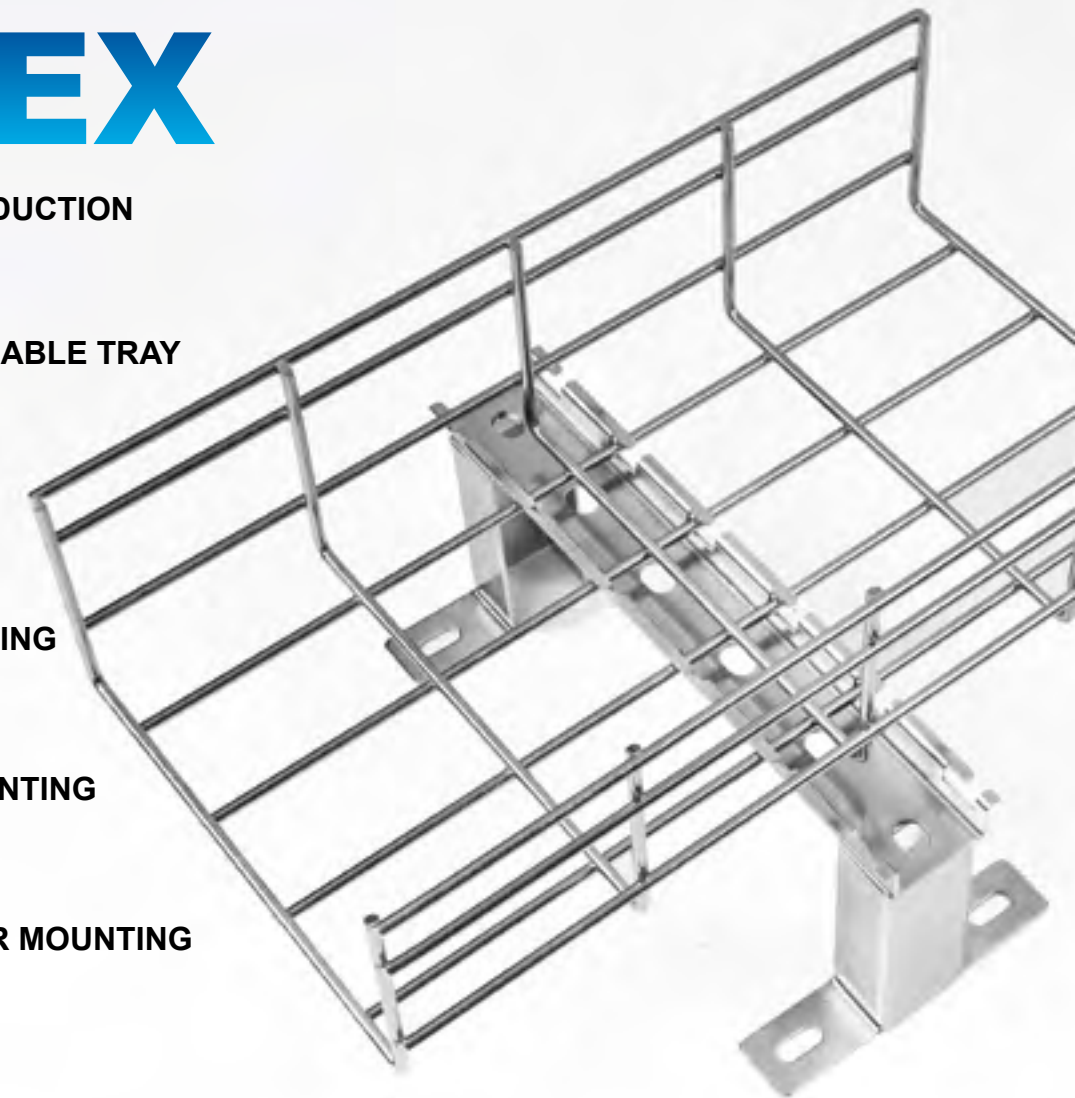


WIRE MESH CABLE TRAY

The second generation open type wire mesh cable tray design , includes indoor and outdoor use widely used in installation cable in different telecommunication houses, electricity units and engineering project.

Feature: easy to install,excellent cable ventilation,energy saving,easy for maintenance and update

Material: carbon steel (Q235B), Stainless steel (304L / 316L)

Surface treatment: 3 finishes for carbon steel, Electro zinc (EZ) for indoor use, hot dip galvanized (HDG) for outdoor use, also powder coated(PC) (colors up to customer).
Acid washing then polished for stainless steel.

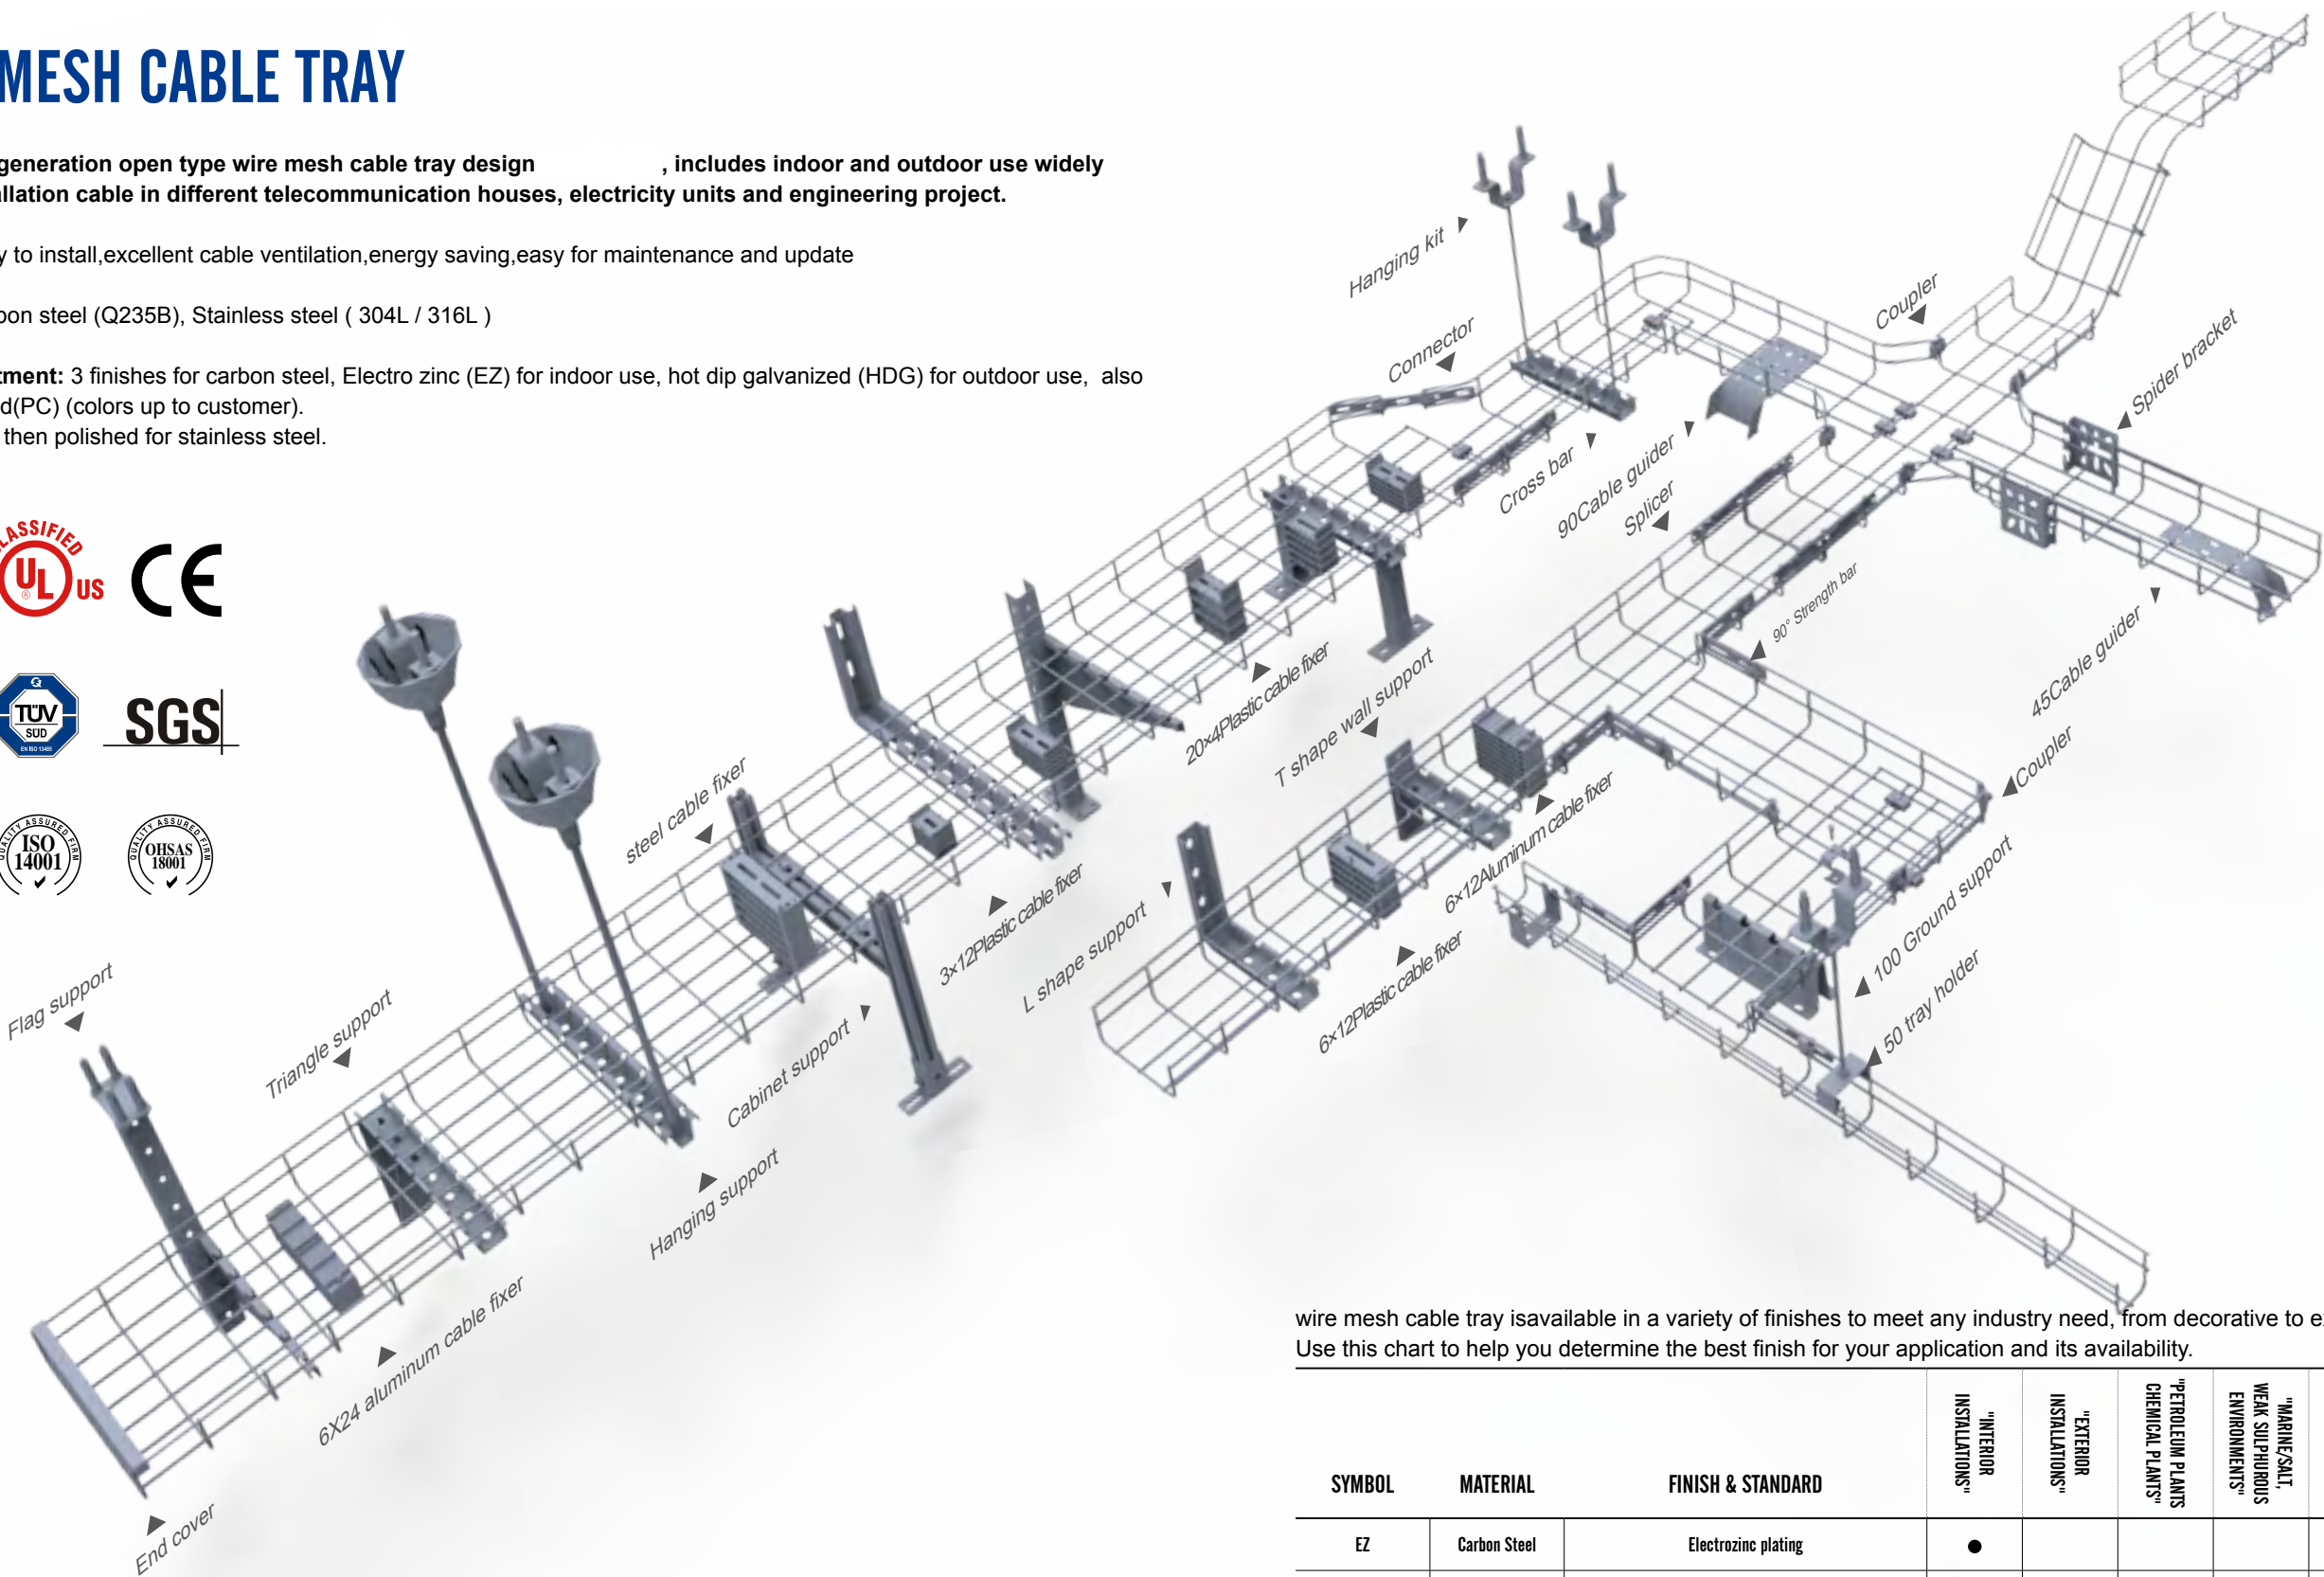

- Easy installation and labor-saving
- On-site fabrication
- Excellent ventilation
- Maximum strength for minimum weight
- Reduce dust retention and improve hygiene of the working environment



wire mesh cable tray is available in a variety of finishes to meet any industry need, from decorative to extreme environments. Use this chart to help you determine the best finish for your application and its availability.

SYMBOL	MATERIAL	FINISH & STANDARD	"INTERIOR INSTALLATIONS"	"EXTERIOR INSTALLATIONS"	"PETROLEUM PLANTS CHEMICAL PLANTS"	"MARINE/SALT WEAK SULPHUROUS ENVIRONMENTS"	"ACIDIC, ALKALINE ENVIRONMENTS"	"FOOD PRODUCTION, WASH DOWN, CLEAN ROOMS"	"HALOGEN ENVIRONMENTS"
EZ	Carbon Steel	Electro zinc plating	●						
HDG	Carbon Steel	Hot Dipped Galvanized		●	○	○	○		
PC	Carbon Steel	Powder Coated	●						
304L	"Stainless Steel 304L"	Cleaned and Passivated		●	●	○	○	●	○
316L	"Stainless Steel 316L"	Cleaned and Passivated		●	●	●	●	●	●

● Recommended ○ Possible

Wire Mesh Cable Tray


30 HEIGHT U - WIRE TRAY STRAIGHT SECTION

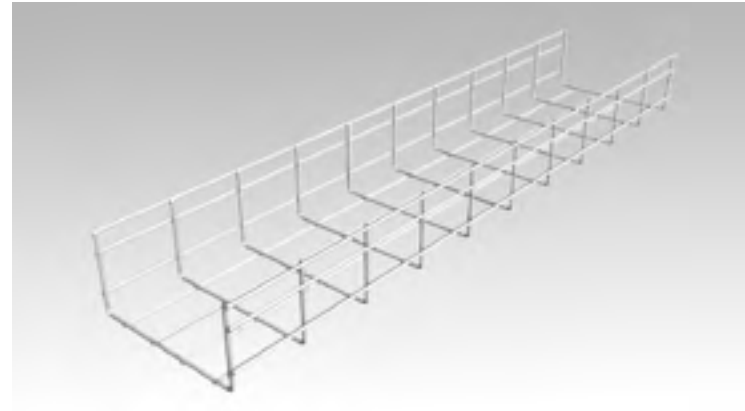


SAFE WORKING LOADS

THE WIRE MESH TRAYS ARE TESTED ACCORDING TO IEC 61537 TEST MODEL II - A JOINT IN THE INTERMEDIATE SPAN(F2)


TEST MODEL II




H30 R4 Wire Mesh Cable Tray SWL per 1.5m span

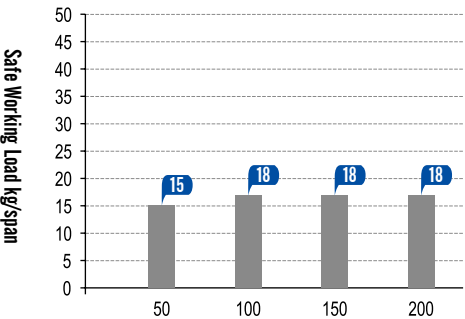

H30 R5 Wire Mesh Cable Tray SWL per 1.5m span

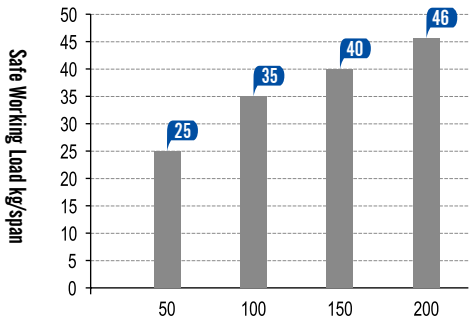

Height (mm)	Width (mm)	Sectional View
30	100	
30	150	
30	200	
30	300	

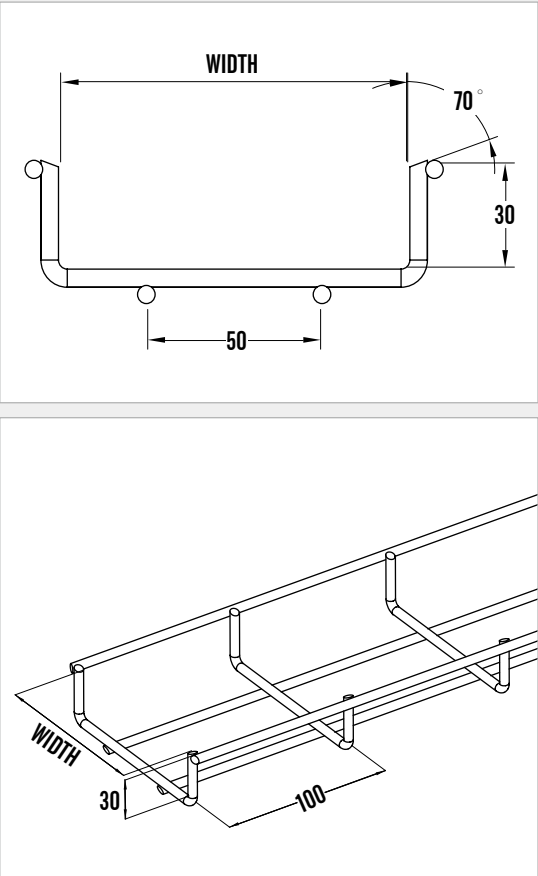

Wire Mesh Cable Tray

30 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	4		30	1.2	100	4	3000	10	2.73	1.24	BS14111	BS14112	BS14113	BS14114	BS14115
U-WIRE TRAY STRAIGHT SECTION	4		30	1.2	150	6	3000	10	3.70	1.68	BS14121	BS14122	BS14123	BS14124	BS14125
U-WIRE TRAY STRAIGHT SECTION	4		30	1.2	200	8	3000	10	4.70	2.13	BS14131	BS14132	BS14133	BS14134	BS14135
U-WIRE TRAY STRAIGHT SECTION	4		30	1.2	300	12	3000	10	5.68	2.58	BS14141	BS14142	BS14143	BS14144	BS14145

30 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	5		30	1.2	100	4	3000	10	4.25	1.93	BS15111	BS15112	BS15113	BBS15114	BS15115
U-WIRE TRAY STRAIGHT SECTION	5		30	1.2	150	6	3000	10	5.79	2.63	BS15121	BS15122	BS15123	BS15124	BS15125
U-WIRE TRAY STRAIGHT SECTION	5		30	1.2	200	8	3000	10	7.33	3.33	BS15131	BS15132	BS15133	BS15134	BS15135
U-WIRE TRAY STRAIGHT SECTION	5		30	1.2	300	12	3000	10	8.87	4.03	BS15141	BS15142	BS15143	BS15144	BS15145


30 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	6		30	1.2	100	4	3000	10	6.12	2.78	BS16111	BS16112	BS16113	BS16114	BS16115
U-WIRE TRAY STRAIGHT SECTION	6		30	1.2	150	6	3000	10	8.34	3.79	BS16121	BS16122	BS16123	BS16124	BS16125
U-WIRE TRAY STRAIGHT SECTION	6		30	1.2	200	8	3000	10	10.56	4.80	BS16131	BS16132	BS16133	BS16134	BS16135
U-WIRE TRAY STRAIGHT SECTION	6		30	1.2	300	12	3000	10	12.76	5.80	BS16141	BS16142	BS16143	BS16144	BS16145

Non stock item in thailand

Wire Mesh Cable Tray


50 HEIGHT U - WIRE TRAY STRAIGHT SECTION

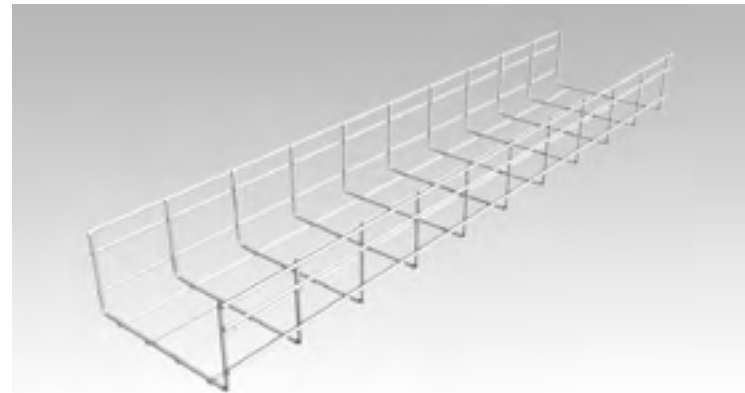


SAFE WORKING LOADS

THE WIRE MESH TRAYS ARE TESTED ACCORDING TO IEC 61537 TEST MODEL II - A JOINT IN THE INTERMEDIATE SPAN(F2)


TEST MODEL II




H50 R4 Wire Mesh Cable Tray SWL per 1.5m span

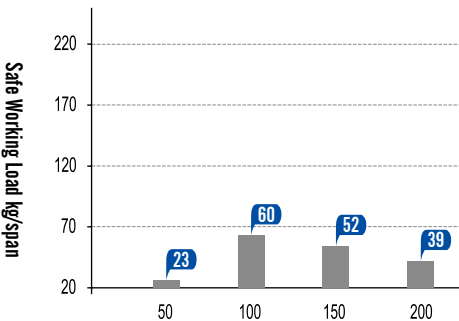



H50 R5 Wire Mesh Cable Tray SWL per 1.5m span

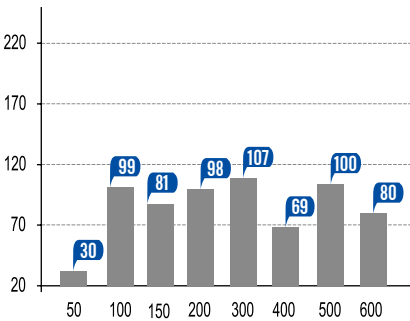

H50 R6 Wire Mesh Cable Tray SWL per 1.5m span

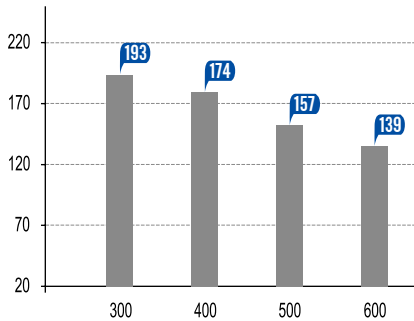

Height (mm)	Width (mm)	Sectional View
50	50	
50	100	
50	150	
50	200	
50	300	

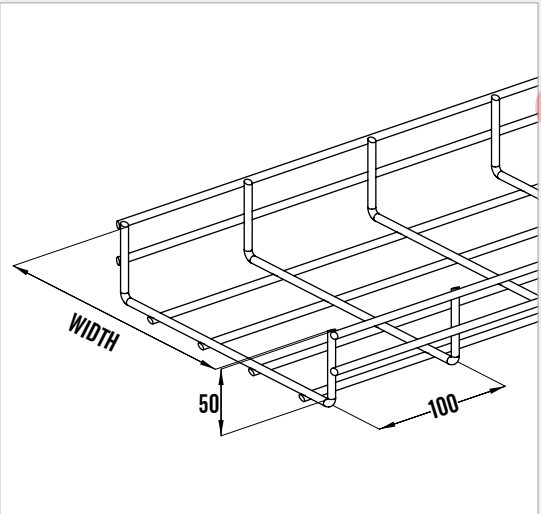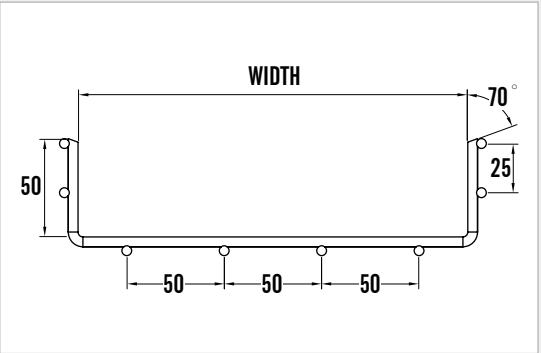

Wire Mesh Cable Tray

Height (mm)	Width (mm)	Sectional View
50	400	
50	500	
50	600	

50 HEIGHT U - WIRE TRAY STRAIGHT SECTION

	ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
		mm	mm	inch	mm	inch	mm	foot	lb	kg					
Stock	U-WIRE TRAY STRAIGHT SECTION	4	50	2	50	2	3000	10	4.29	1.95	BS14211	BS14212	BS14213	BS14214	BS14215
Stock	U-WIRE TRAY STRAIGHT SECTION	4	50	2	100	4	3000	10	5.26	2.39	BS14221	BS14222	BS14223	BS14224	BS14225
Stock	U-WIRE TRAY STRAIGHT SECTION	4	50	2	150	6	3000	10	6.27	2.85	BS14231	BS14232	BS14233	BS14234	BS14235
Stock	U-WIRE TRAY STRAIGHT SECTION	4	50	2	200	8	3000	10	7.26	3.30	BS14241	BS14242	BS14243	BS14244	BS14245
	U-WIRE TRAY STRAIGHT SECTION	4	50	2	300	12	3000	10	9.22	4.19	BS14251	BS14252	BS14253	BS14254	BS14255
	U-WIRE TRAY STRAIGHT SECTION	4	50	2	400	16	3000	10	11.20	5.09	BS14261	BS14262	BS14263	BS14264	BS14265
	U-WIRE TRAY STRAIGHT SECTION	4	50	2	500	20	3000	10	13.16	5.98	BS14271	BS14272	BS14273	BS14274	BS14275
	U-WIRE TRAY STRAIGHT SECTION	4	50	2	600	24	3000	10	15.14	6.88	BS14281	BS14282	BS14283	BS14284	BS14285

Non stock item. Need to order from factory

Wire Mesh Cable Tray

50 HEIGHT U - WIRE TRAY STRAIGHT SECTION

Non stock item need to order form factory

ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	5	50	2	50	2	3000	10	6.69	3.04	BS15211	BS15212	BS15213	BS15214	BS15215
U-WIRE TRAY STRAIGHT SECTION	5	50	2	100	4	3000	10	8.23	3.74	BS15221	BS15222	BS15223	BS15224	BS15225
U-WIRE TRAY STRAIGHT SECTION	5	50	2	150	6	3000	10	9.79	4.45	BS15231	BS15232	BS15233	BS15234	BS15235
U-WIRE TRAY STRAIGHT SECTION	5	50	2	200	8	3000	10	11.35	5.16	BS15241	BS15242	BS15243	BS15244	BS15245
U-WIRE TRAY STRAIGHT SECTION	5	50	2	300	12	3000	10	14.41	6.55	BS15251	BS15252	BS15253	BS15254	BS15255
U-WIRE TRAY STRAIGHT SECTION	5	50	2	400	16	3000	10	17.49	7.95	BS15261	BS15262	BS15263	BS15264	BS15265
U-WIRE TRAY STRAIGHT SECTION	5	50	2	500	20	3000	10	20.57	9.35	BS15271	BS15272	BS15273	BS15274	BS15275
U-WIRE TRAY STRAIGHT SECTION	5	50	2	600	24	3000	10	23.65	10.75	BS15281	BS15282	BS15283	BS15284	BS15285

Stock

Stock

50 HEIGHT U - WIRE TRAY STRAIGHT SECTION


ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	6	50	2	50	2	3000	10	9.64	4.38	BS16211	BS16212	BS16213	BS16214	BS16215
U-WIRE TRAY STRAIGHT SECTION	6	50	2	100	4	3000	10	11.86	5.39	BS16221	BS16222	BS16223	BS16224	BS16225
U-WIRE TRAY STRAIGHT SECTION	6	50	2	150	6	3000	10	14.10	6.41	BS16231	BS16232	BS16234	BS16234	BS16235
U-WIRE TRAY STRAIGHT SECTION	6	50	2	200	8	3000	10	16.35	7.43	BS16241	BS16242	BS16243	BS16244	BS16245
U-WIRE TRAY STRAIGHT SECTION	6	50	2	300	12	3000	10	20.75	9.43	BS16251	BS16252	BS16253	BS16254	BS16255
U-WIRE TRAY STRAIGHT SECTION	6	50	2	400	16	3000	10	25.19	11.45	BS16261	BS16262	BS16263	BS16264	BS16265
U-WIRE TRAY STRAIGHT SECTION	6	50	2	500	20	3000	10	29.61	13.46	BS16271	BS16272	BS16273	BS16274	BS16275
U-WIRE TRAY STRAIGHT SECTION	6	50	2	600	24	3000	10	34.06	15.48	BS16281	BS16282	BS16283	BS16284	BS16285

Stock

Stock

Wire Mesh Cable Tray


100 HEIGHT U - WIRE TRAY STRAIGHT SECTION

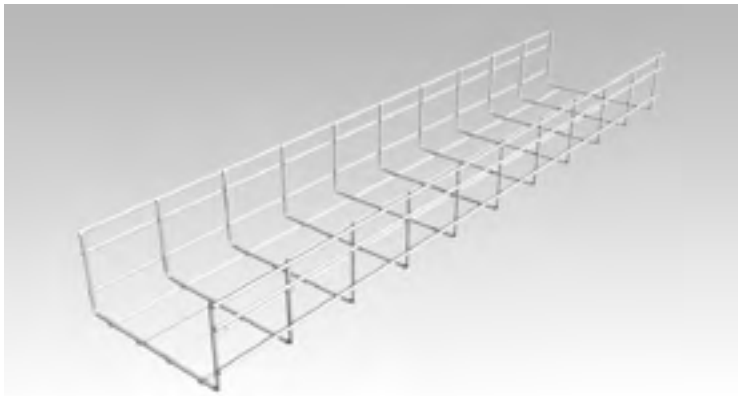


SAFE WORKING LOADS

THE WIRE MESH TRAYS ARE TESTED ACCORDING TO IEC 61537 TEST MODEL II - A JOINT IN THE INTERMEDIATE SPAN(F2)


TEST MODEL II




H100 R4 Wire Mesh Cable Tray SWL per 1.5m span

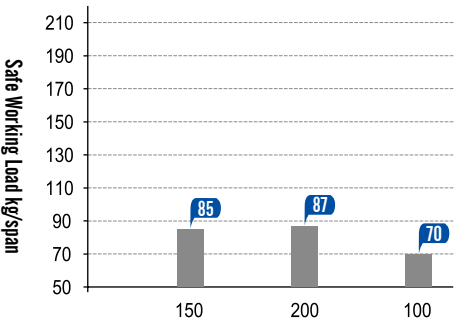



H100 R5 Wire Mesh Cable Tray SWL per 1.5m span

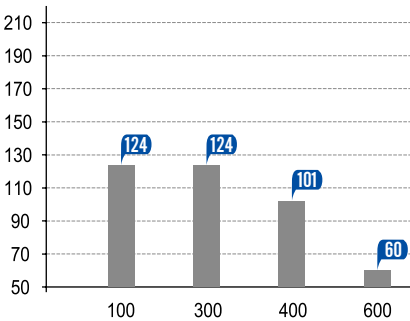

H100 R6 Wire Mesh Cable Tray SWL per 1.5m span

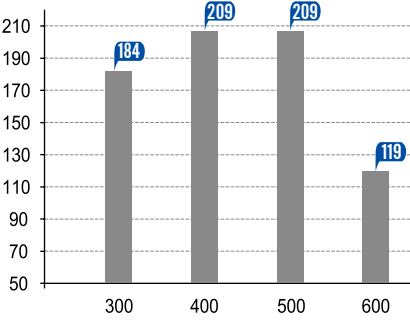

Height (mm)	Width (mm)	Sectional View
100	100	
100	150	
100	200	
100	300	

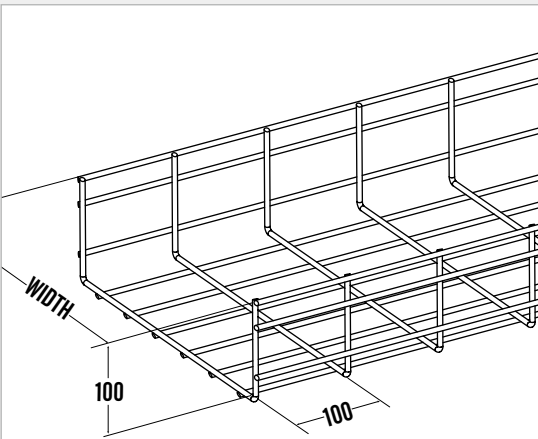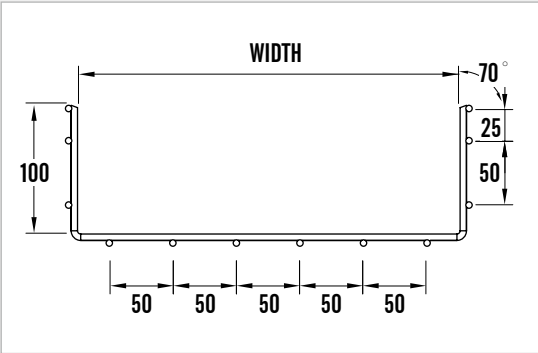

Wire Mesh Cable Tray

Height (mm)	Width (mm)	Sectional View
100	400	
100	500	
100	600	

100 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	4		100	4	100	4	3000	10	7.26	3.30	BS14321	BS14322	BS14323	BS14324	BS14325
U-WIRE TRAY STRAIGHT SECTION	4		100	4	150	6	3000	10	8.23	3.74	BS14331	BS14332	BS14333	BS14334	BS14335
U-WIRE TRAY STRAIGHT SECTION	4		100	4	200	8	3000	10	9.22	4.19	BS14341	BS14342	BS14343	BS14344	BS14345
U-WIRE TRAY STRAIGHT SECTION	4		100	4	300	12	3000	10	11.20	5.09	BS14351	BS14352	BS14353	BS14354	BS14355
U-WIRE TRAY STRAIGHT SECTION	4		100	4	400	16	3000	10	13.16	5.98	BS14361	BS14362	BS14363	BS14364	BS14365
U-WIRE TRAY STRAIGHT SECTION	4		100	4	500	20	3000	10	15.14	6.88	BS14371	BS14372	BS14373	BS14374	BS14375
U-WIRE TRAY STRAIGHT SECTION	4		100	4	600	24	3000	10	17.12	7.78	BS14381	BS14382	BS14383	BS14384	BS14385

Wire Mesh Cable Tray

100 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	5		100	4	100	4	3000	10	11.35	5.15	BS15321	BS15322	BS15323	BS15324	BS15325
U-WIRE TRAY STRAIGHT SECTION	5		100	4	150	6	3000	10	12.9	5.85	BS15331	BS15332	BS15333	BS15334	BS15335
U-WIRE TRAY STRAIGHT SECTION	5		100	4	200	8	3000	10	14.44	6.55	BS15341	BS15342	BS15343	BS15344	BS15345
U-WIRE TRAY STRAIGHT SECTION	5		100	4	300	12	3000	10	17.53	7.95	BS15351	BS15352	BS15353	BS15354	BS15355
U-WIRE TRAY STRAIGHT SECTION	5		100	4	400	16	3000	10	20.61	9.35	BS15361	BS15362	BS15363	BS15364	BS15365
U-WIRE TRAY STRAIGHT SECTION	5		100	4	500	20	3000	10	23.7	10.75	BS15371	BS15372	BS15373	BS15374	BS15375
U-WIRE TRAY STRAIGHT SECTION	5		100	4	600	24	3000	10	26.79	12.15	BS15381	BS15382	BS15383	BS15384	BS15385

100 HEIGHT U - WIRE TRAY STRAIGHT SECTION


ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	6		100	4	100	4	3000	10	16.30	7.41	BS16321	BS16322	BS16323	BS16324	BS16325
U-WIRE TRAY STRAIGHT SECTION	6		100	4	150	6	3000	10	18.52	8.42	BS16331	BS16332	BS16333	BS16334	BS16335
U-WIRE TRAY STRAIGHT SECTION	6		100	4	200	8	3000	10	14.41	6.55	BS16341	BS16342	BS16343	BS16344	BS16345
U-WIRE TRAY STRAIGHT SECTION	6		100	4	300	12	3000	10	17.49	7.95	BS16351	BS16352	BS16353	BS16354	BS16355
U-WIRE TRAY STRAIGHT SECTION	6		100	4	400	16	3000	10	20.57	9.35	BS16361	BS16362	BS16363	BS16364	BS16365
U-WIRE TRAY STRAIGHT SECTION	6		100	4	500	20	3000	10	23.65	10.75	BS16371	BS16372	BS16373	BS16374	BS16375
U-WIRE TRAY STRAIGHT SECTION	6		100	4	600	24	3000	10	26.73	12.15	BS16381	BS16382	BS16383	BS16384	BS16385

WIRE MESH CABLE TRAY

WIRE MESH CABLE TRAY

Wire Mesh Cable Tray

150 HEIGHT U - WIRE TRAY STRAIGHT SECTION

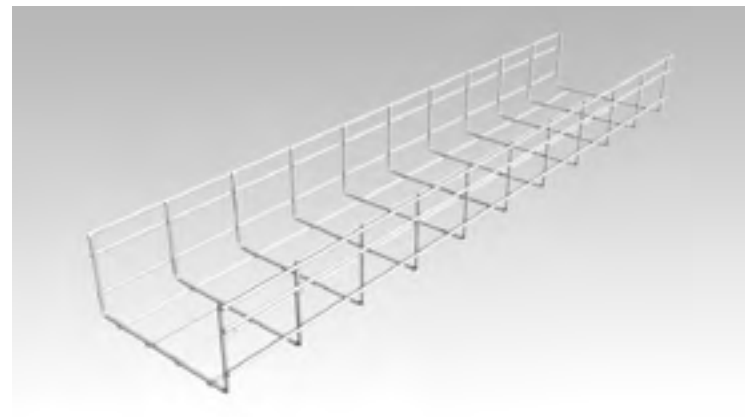

HEIGHT 150 (mm)




WIDTH 300/400/500/600 (mm)

WIRE DIA 4/5/6 (mm)


SAFE WORKING LOADS

THE WIRE MESH TRAYS ARE TESTED ACCORDING TO IEC 61537 TEST MODEL II - A JOINT IN THE INTERMEDIATE SPAN(F2)

TEST MODEL II

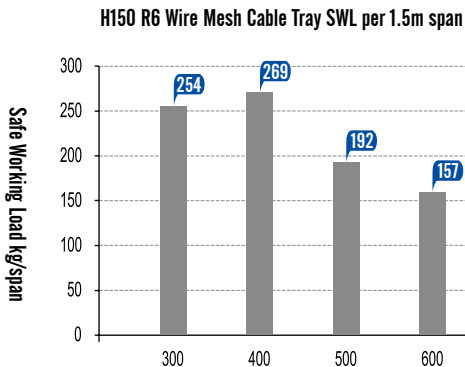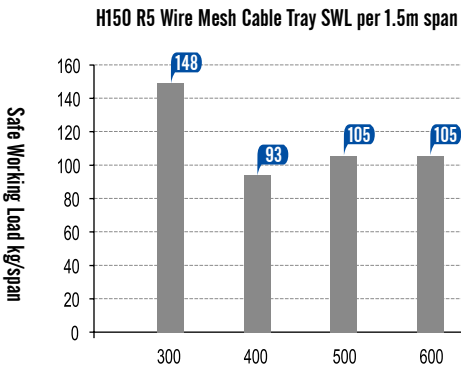

Height (mm)	Width (mm)	Sectional View
50	300	
50	400	
50	500	
50	600	

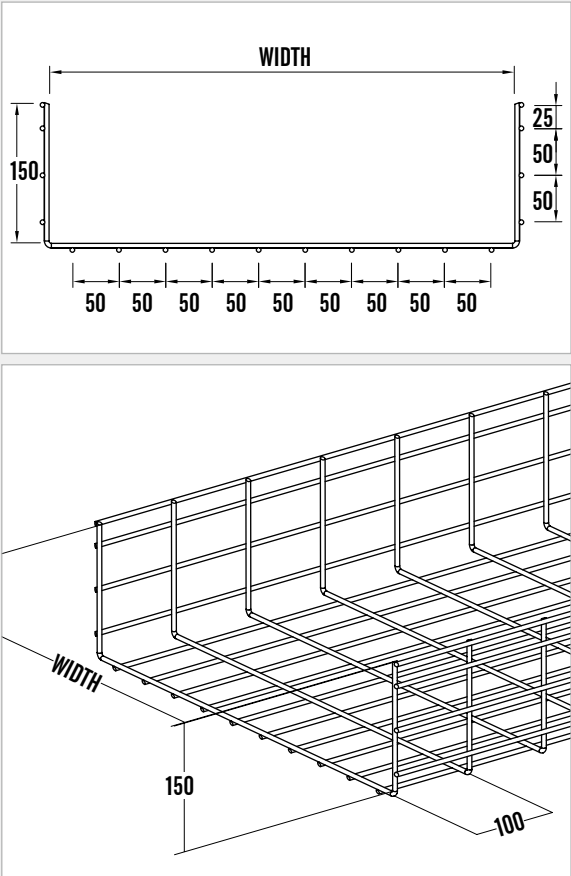

Wire Mesh Cable Tray

150 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	4	150	6	300	12	3000	10	13.16	5.98	BS14451	BS14452	BS14453	BS14454	BS14455
U-WIRE TRAY STRAIGHT SECTION	4	150	6	400	16	3000	10	15.14	6.88	BS14461	BS14462	BS14463	BS14464	BS14465
U-WIRE TRAY STRAIGHT SECTION	4	150	6	500	20	3000	10	17.12	7.78	BS14471	BS14472	BS14473	BS14474	BS14475
U-WIRE TRAY STRAIGHT SECTION	4	150	6	600	24	3000	10	19.07	8.67	BS14481	BS14482	BS14483	BS14484	BS14485

150 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	5	150	6	300	12	3000	10	20.57	9.35	BS15451	BS15452	BS15453	BS15454	BS15455
U-WIRE TRAY STRAIGHT SECTION	5	150	6	400	16	3000	10	23.65	10.75	BS15461	BS15462	BS15463	BS15464	BS15465
U-WIRE TRAY STRAIGHT SECTION	5	150	6	500	20	3000	10	26.73	12.15	BS15471	BS15472	BS15473	BS15474	BS15475
U-WIRE TRAY STRAIGHT SECTION	5	150	6	600	24	3000	10	29.81	13.55	BS15481	BS15482	BS15483	BS15484	BS15485


150 HEIGHT U - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
U-WIRE TRAY STRAIGHT SECTION	6	150	6	300	12	3000	10	29.61	13.46	BS16451	BS16452	BS16453	BS16454	BS16455
U-WIRE TRAY STRAIGHT SECTION	6	150	6	400	16	3000	10	34.06	15.48	BS16461	BS16462	BS16463	BS16464	BS16465
U-WIRE TRAY STRAIGHT SECTION	6	150	6	500	20	3000	10	38.50	17.50	BS16471	BS16472	BS16473	BS16474	BS16475
U-WIRE TRAY STRAIGHT SECTION	6	150	6	600	24	3000	10	42.92	19.51	BS16481	BS16482	BS16483	BS16484	BS16485



Non stock item

Wire Mesh Cable Tray

SX A01 - WIRE TRAY STRAIGHT SECTION

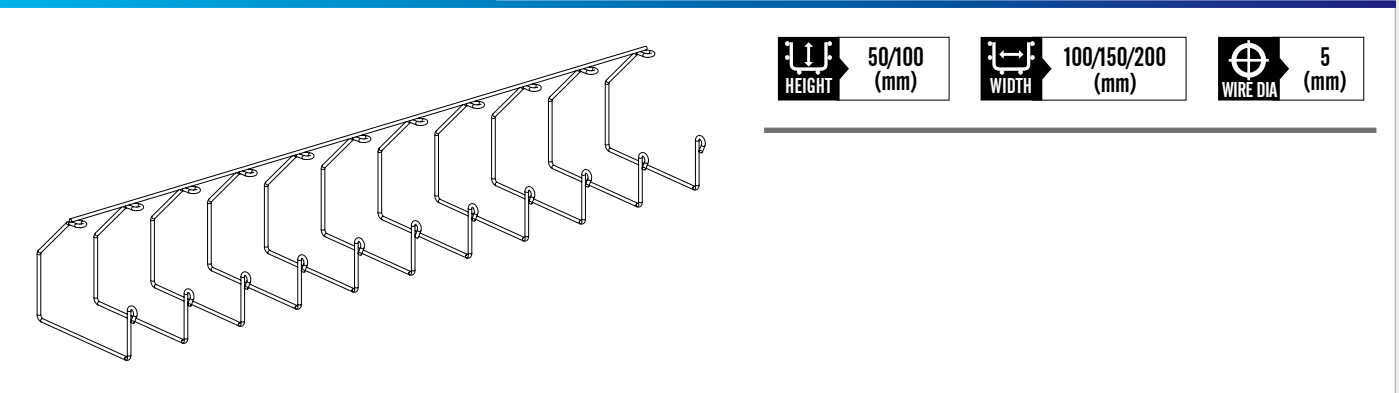

Height (mm)	Width (mm)	Sectional View
50	100	
50	150	
100	150	
100	200	

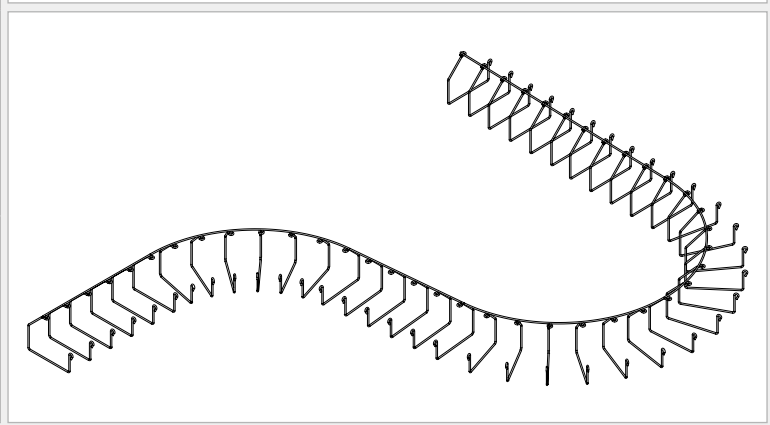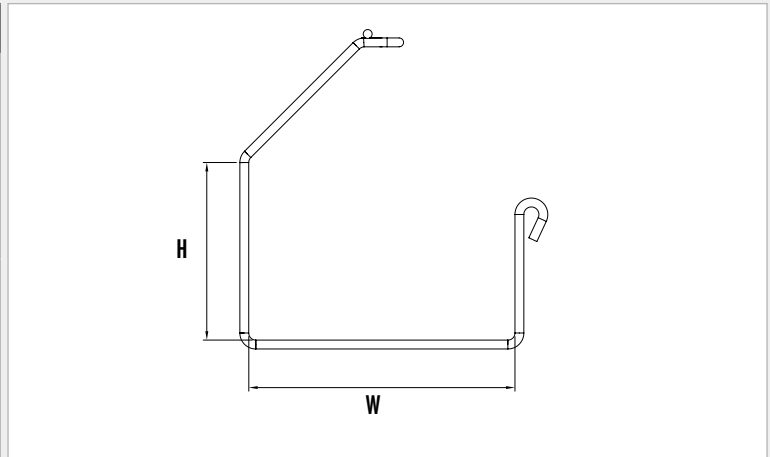


SX A01 - WIRE TRAY STRAIGHT SECTION



ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
SX A01-50-100-5	5	50	2	100	4	3000	10	5.45	2.47	SX15011	SX15012	SX15013	SX15014	SX15015
SX A02-50-150-5	5	50	2	150	6	3000	10	6	2.72	SX15021	SX15022	SX15023	SX15024	SX15025
SX A03-100-150-5	5	100	4	150	6	3000	10	7.12	3.23	SX15031	SX15032	SX15033	SX15034	SX15035
SX A04-100-200-5	5	100	4	200	8	3000	10	7.67	3.48	SX15041	SX15042	SX15043	SX15044	SX15045

Wire Mesh Cable Tray

SX B01 - WIRE TRAY STRAIGHT SECTION

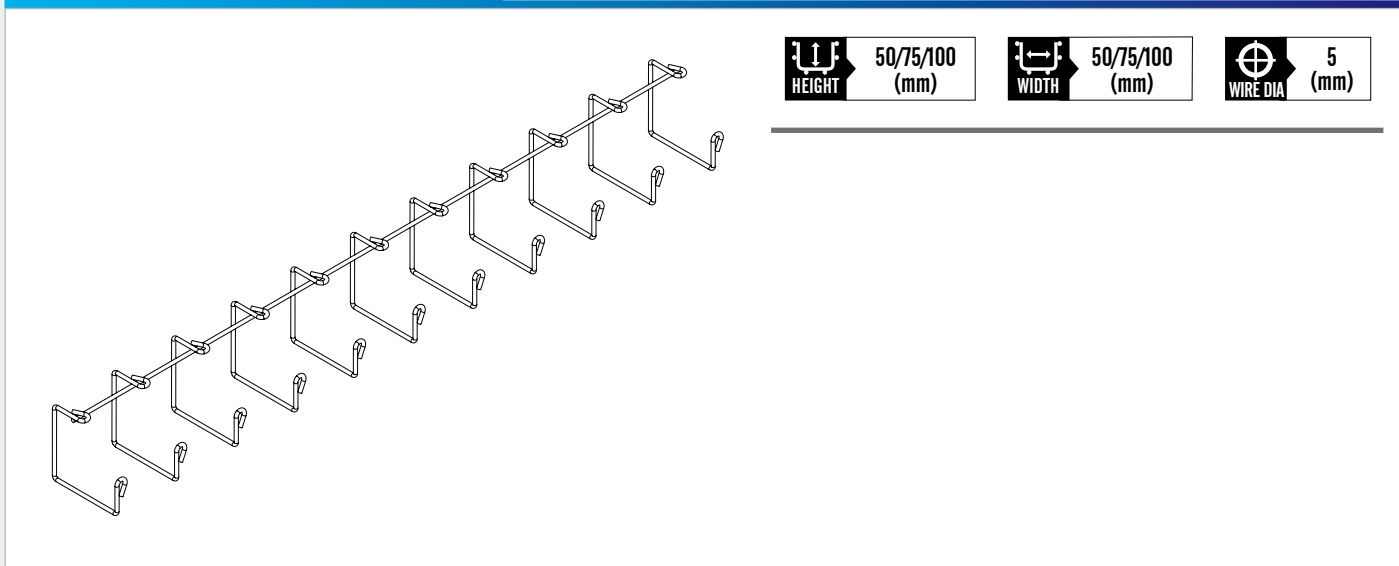

Height (mm)	Width (mm)	Sectional View
50	50	
75	75	
100	100	

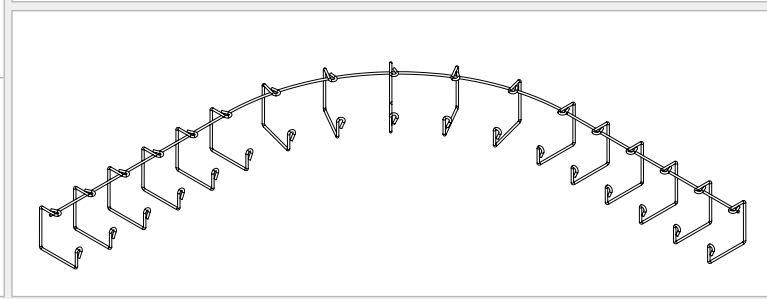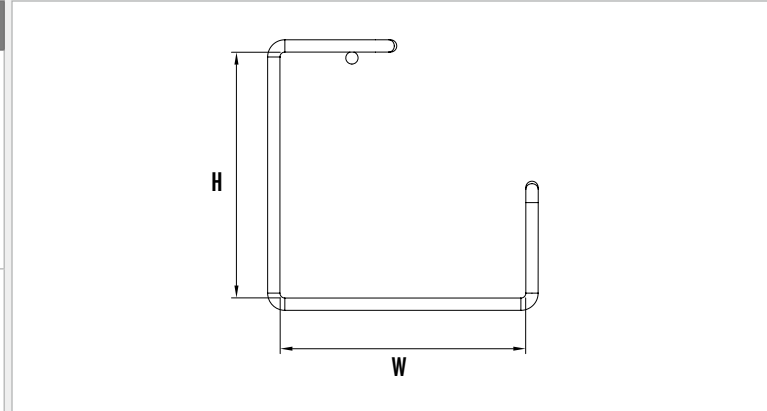


SX B01 - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
SX B01-50-50-5	5	50	2	50	2	3000	10	3.68	1.67	SX15111	SX15112	SX15113	SX15114	SX15115
SX B02-75-75-5	5	75	3	75	3	3000	10	4.59	2.08	SX15121	SX15122	SX15123	SX15124	SX15125
SX B03-100-100-5	5	100	4	100	4	3000	10	5.42	2.46	SX15131	SX15132	SX15133	SX15134	SX15135

Wire Mesh Cable Tray

SX C01 - WIRE TRAY STRAIGHT SECTION

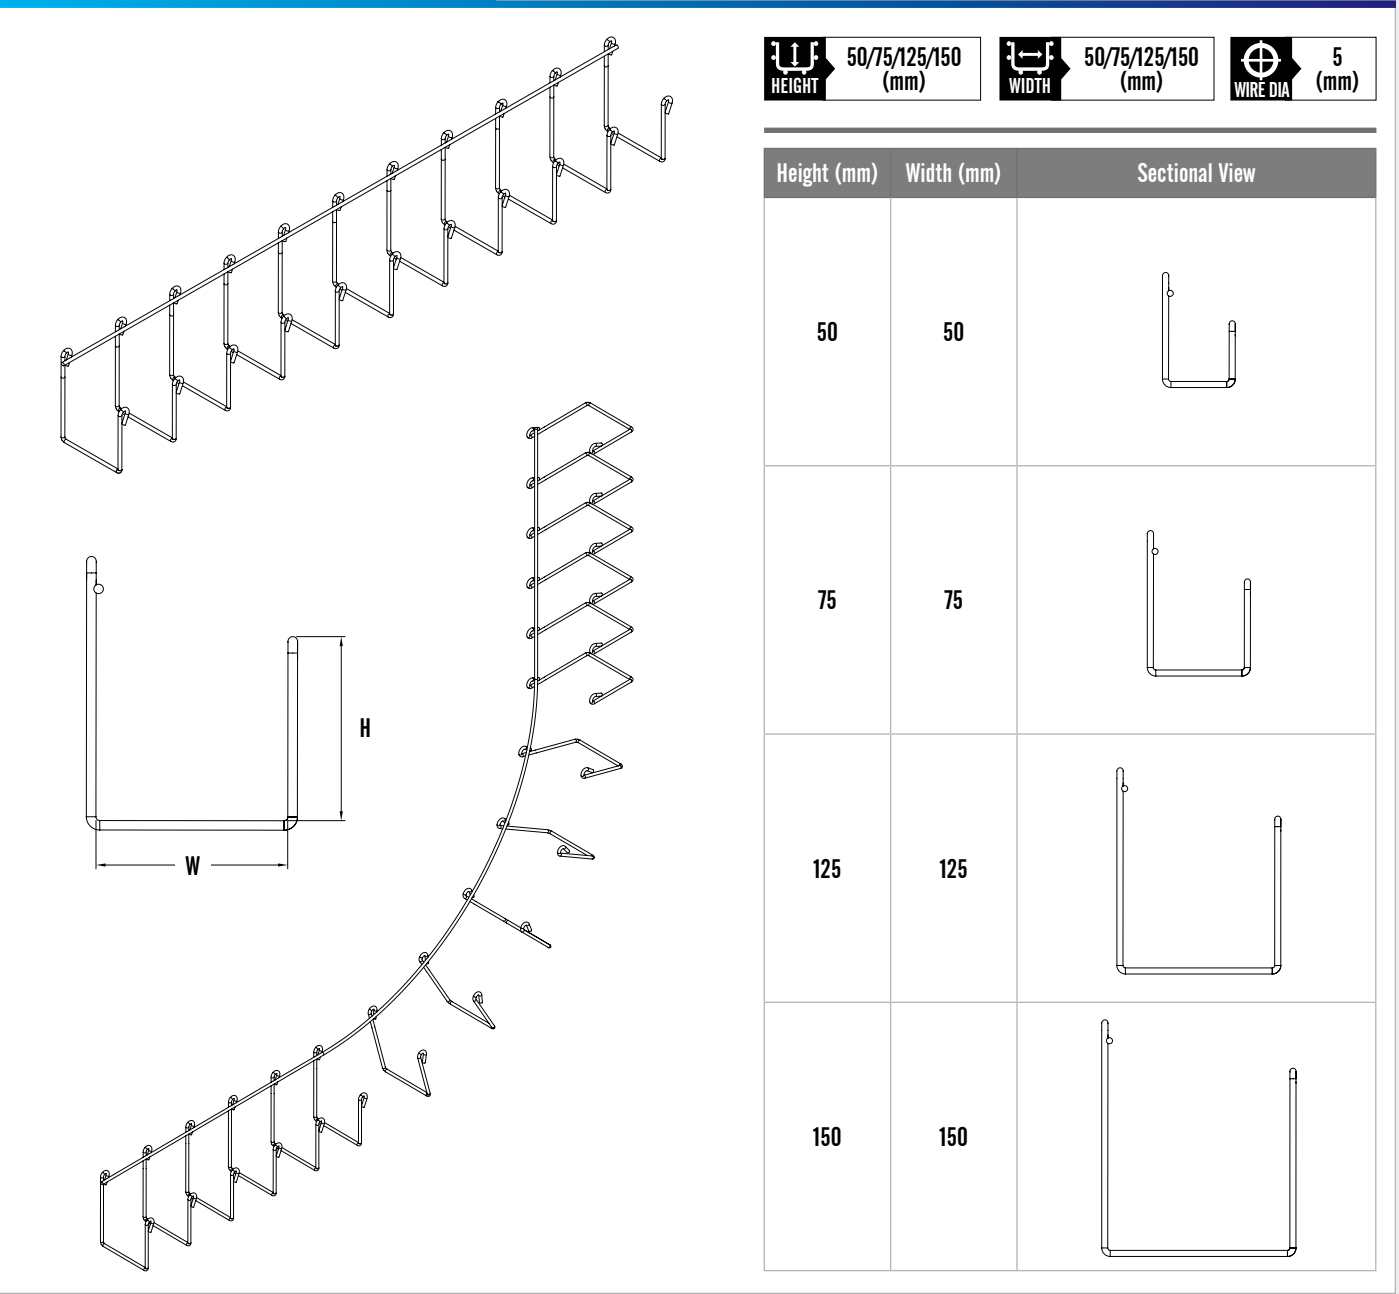


SX C01 - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA		HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	foot	lb	kg					
SX C01-50-50-5	5		50	2	50	2	3000	10	3.88	1.76	SX15211	SX15212	SX15213	SX15214	SX15215
SX C02-75-75-5	5		75	3	75	3	3000	10	4.70	2.14	SX15221	SX15222	SX15223	SX15224	SX15225
SX C03-125-125-5	5		125	5	125	5	3000	10	6.39	2.90	SX15231	SX15232	SX15233	SX15234	SX15235
SX C03-150-150-5	5		150	6	150	6	3000	10	7.23	3.28	SX15241	SX15242	SX15243	SX15244	SX15245

Wire Mesh Cable Tray

SX D01 - WIRE TRAY STRAIGHT SECTION

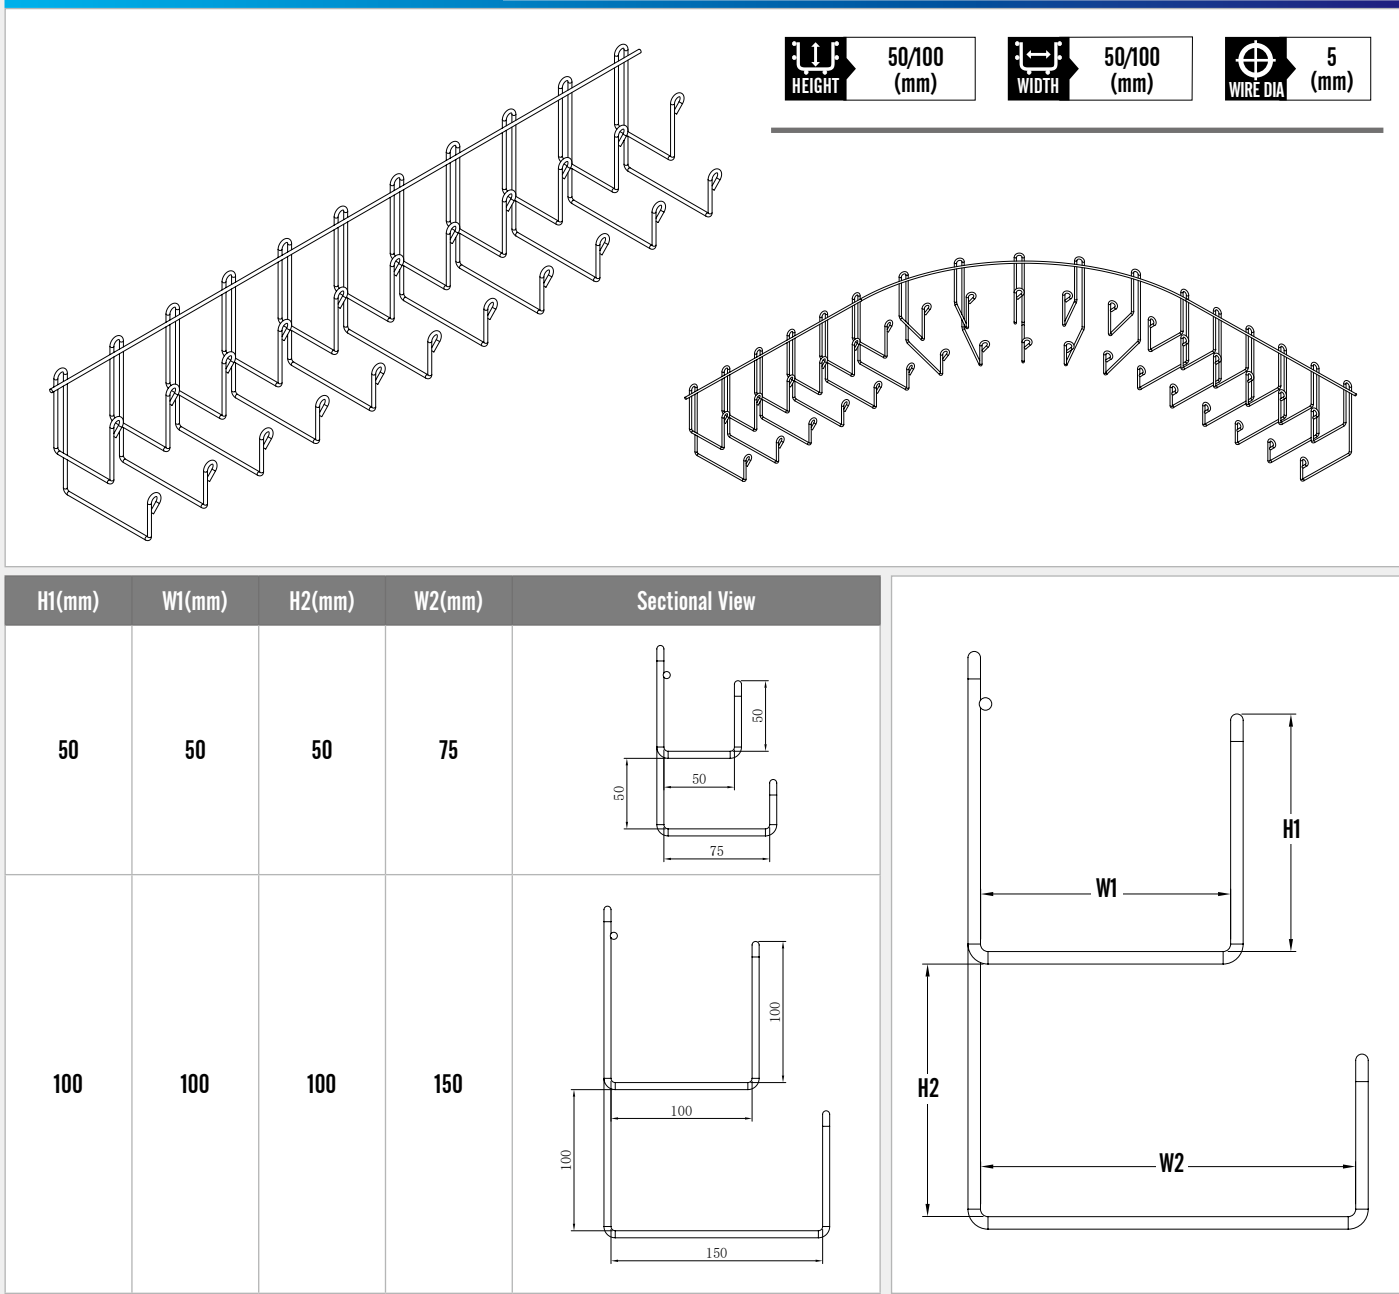


SX D01 - WIRE TRAY STRAIGHT SECTION


ITEM NAME	WIRE DIA		H1		W1		H2		W2		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm		mm	inch	mm	inch	mm	inch	mm	inch	mm	foot	lb	kg					
SX D01-50-50-5	5		50	2	50	2	50	2	75	3	3000	10	6.4	2.90	SX15311	SX15312	SX15313	SX15314	SX15315
SX D02-100-100-5	5		100	4	100	4	100	4	100	4	3000	10	10.4	4.72	SX15321	SX15322	SX15323	SX15324	SX15325

Wire Mesh Cable Tray

SX E01 - WIRE TRAY STRAIGHT SECTION

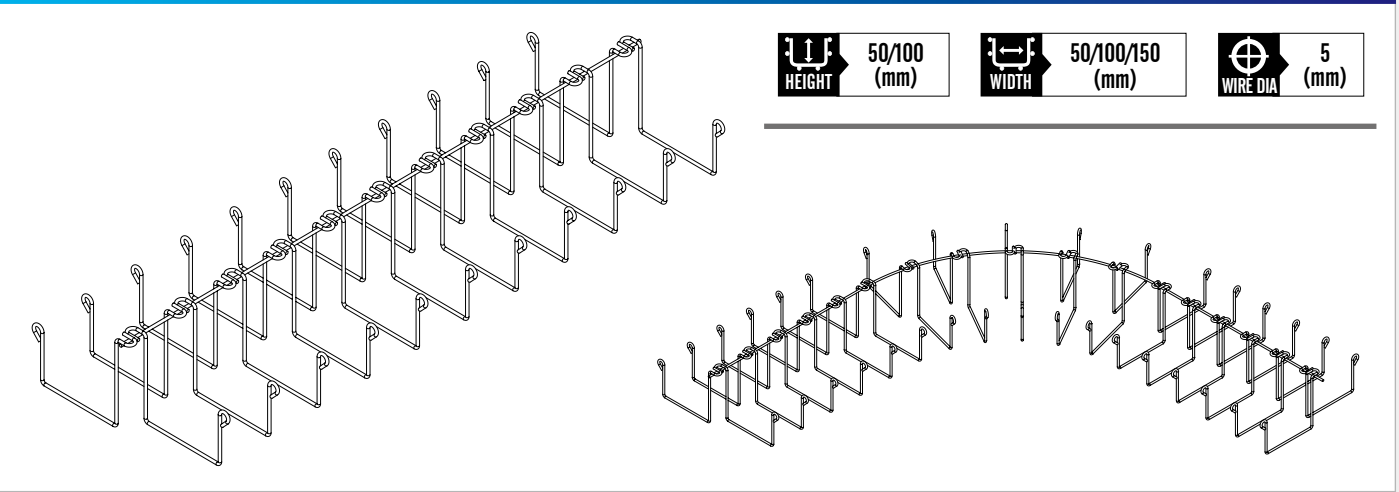

Height (mm)	Width (mm)	Sectional View
50	50	
50	100	
100	100	
100	150	

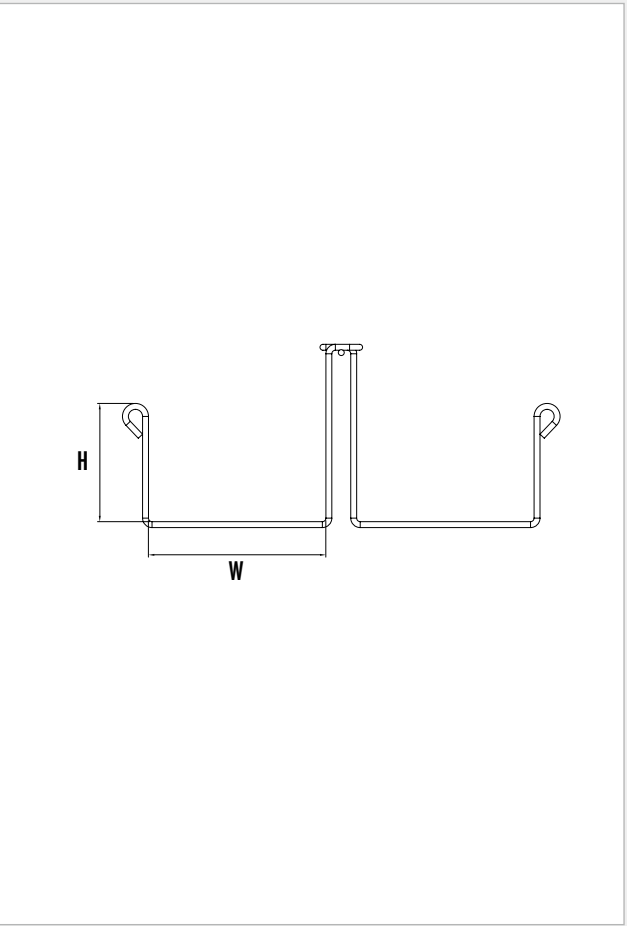


SX E01 - WIRE TRAY STRAIGHT SECTION

ITEM NAME	WIRE DIA	HEIGHT		WIDTH		LENGTH		WEIGHT (PER METER)		ELECTROPLATE	HOT DIP GALVANIZING	POWDER COATING	STAINLESS STEEL 304L	STAINLESS STEEL 316L
	mm	mm	inch	mm	inch	mm	foot	lb	kg					
SX E01-50-50-5	5	50	2	50	2	3000	10	7.8	3.54	SX15411	SX15412	SX15413	SX15414	SX15415
SX E02-50-100-5	5	50	2	100	4	3000	10	8.93	4.053	SX15421	SX15422	SX15423	SX15424	SX15425
SX E03-100-100-6	5	100	4	100	4	3000	10	11.18	5.07	SX15431	SX15432	SX15433	SX15434	SX15435
SX E04-100-150-7	5	100	4	150	6	3000	10	12.32	5.589	SX15441	SX15442	SX15443	SX15444	SX15445


ACCESSORIES FOR SX SERIES

DJ-01

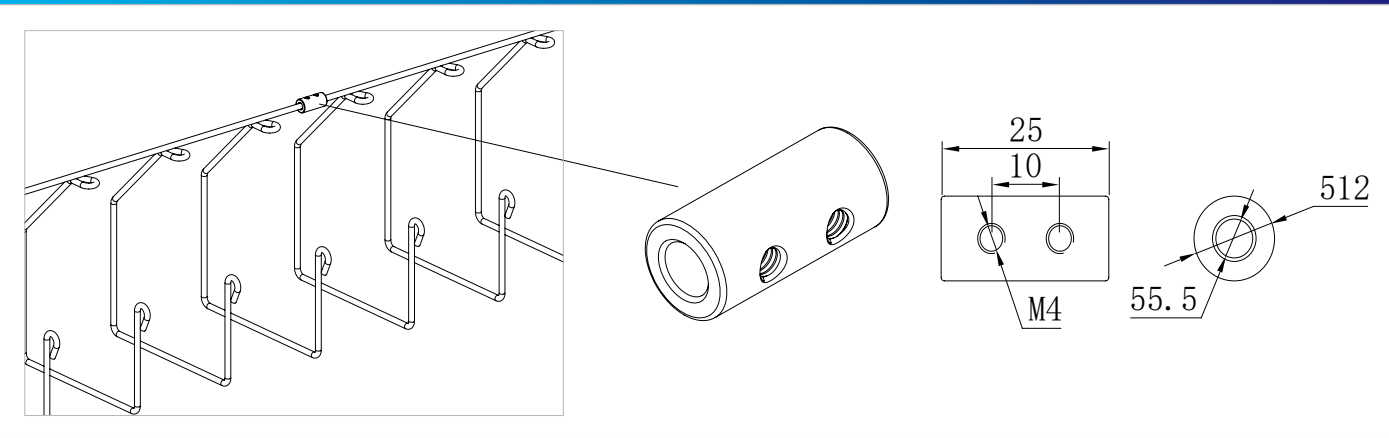

ITEM NAME	SIZE(mm)	WEIGHT(kg)	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
DJ-01	Φ12×25	1.51	DJ011	DJ012	DJ013	DJ014	DJ015

DJ-02

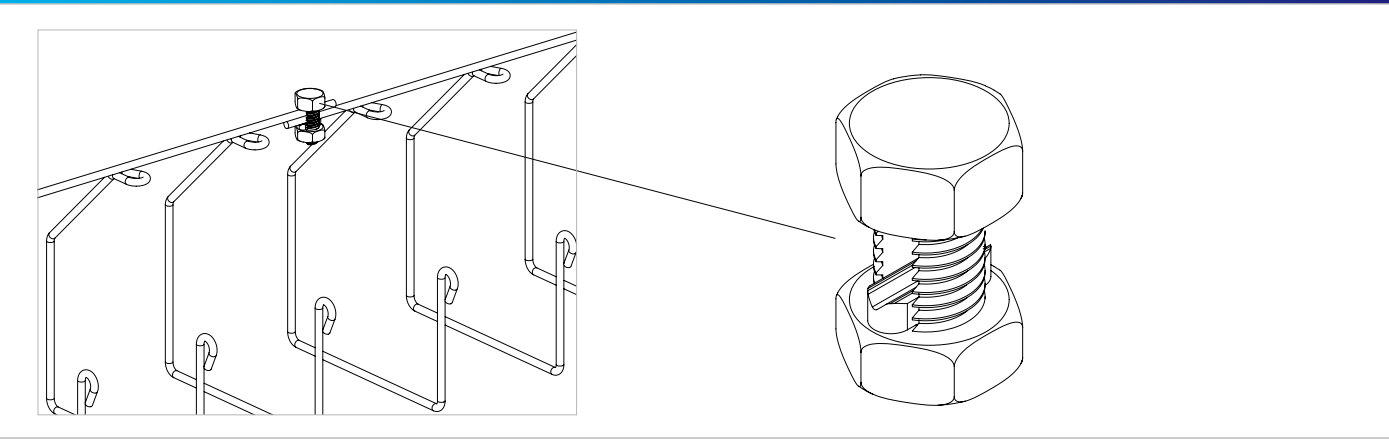

ITEM NAME	SIZE(mm)	WEIGHT(kg)	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
DJ-02	M12×22	4.3	DJ021	DJ022	DJ023	DJ024	DJ025

SPLICING

COUPLER KIT



COUPLER KIT INCLUDES AN PLATE, AN STUDDED PLATE,A M6X20 CARRIAGE BOLT AND AN M6 FLANGE NUT.

- ✓ Be used to all of straight sections connection.
- \$ Can be sold individually.




- 1. M6×20 Carriage bolt
- 2. Plate
- 3. Studded Plate
- 4. M6 Flange nut

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
COULPER KIT	BFK011	BFK012	BFK013	BFK014	BFK015
M6×20 CARRIAGE BOLT	T011	-	-	T014	T015
PLATE	BF011	BF012	BF013	BF014	BF015
STUDDED PLATE	BF021	BF022	BF023	BF024	BF025
M6 FLANGE NUT	T021	-	-	T024	T025

SCOPE OF APPLICATION AND QUANTITY

	H50-H100-H150	2"(50mm)	4"-8"(100-200mm)	12"-24"(300-600mm)
 Side Recommended Quantity	2 x Coupler Kit	2 x Coupler Kit	2 x Coupler Kit	
 Bottom Recommended Quantity	-	1 x Coupler Kit	2 x Coupler Kit	

OTHER APPLICATION

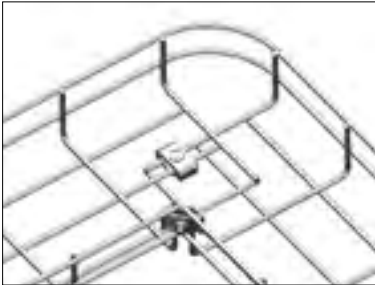

SPLICING

STRENGTHENING BAR KIT



STRENGTHENING BAR KIT INCLUDES A STRENGTHENING BAR,THREE COUPLER KITS, THREE M6X20 CARRIAGE BOLTS AND THREE M6 NUTS.

- ✓ Be used to connect the straight sections in the horizontal direction.
- \$ Can be sold individually.




ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
STRENGTHENING BAR KIT	BFK021	BFK022	BFK023	BFK024	BFK025
STRENGTHENING BAR	BF031	BF032	BF033	BF034	BF035
COUPLER KIT	BFK011	BFK012	BFK013	BFK014	BFK015

SCOPE OF APPLICATION AND QUANTITY

 H50-H100-H150	 2"(50mm)	 4"-8"(100-200mm)	 12"-24"(300-600mm)
 Side Recommended Quantity	2 x Strengthening Bar Kit	2 x Strengthening Bar Kit	2 x Strengthening Bar Kit
 Bottom Recommended Quantity	-	1 x Coupler Kit	2 x Coupler Kit

OTHER APPLICATION

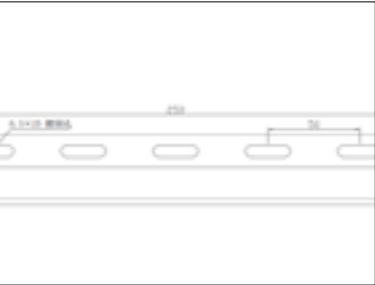

SPLICING

FAST LOCKING CONNECTOR




EASY INSTALLATION WHICH ELIMINATE THE USE OF SCREW, SAFE AND FIRM,ALSO APPLY TO CONNECT THE STRAIGHT SECTIONS WHICH NEEDS HIGH LOAD-BEARING CAPACITY WITH COUPLER KITS USED TOGETHER

- ✓ Be used to connect the same width straight section in the horizontal direction.
- \$ Can be sold individually.




ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
FAST DOCKING BAR	BF041	BF042	BF043	BF044	BF045
COUPER KIT	BFK011	BFK012	BFK013	BFK014	BFK015

SCOPE OF APPLICATION AND QUANTITY			
 H50-H100-H150	 2"(50mm)	 4"-8"(100-200mm)	 12"-24"(300-600mm)
 Side Recommended Quantity	2 X Fast locking connector	2 X Fast locking connector	2 X Fast locking connector
 Bottom Recommended Quantity	-	1 x Coupler Kit	2 x Coupler Kit

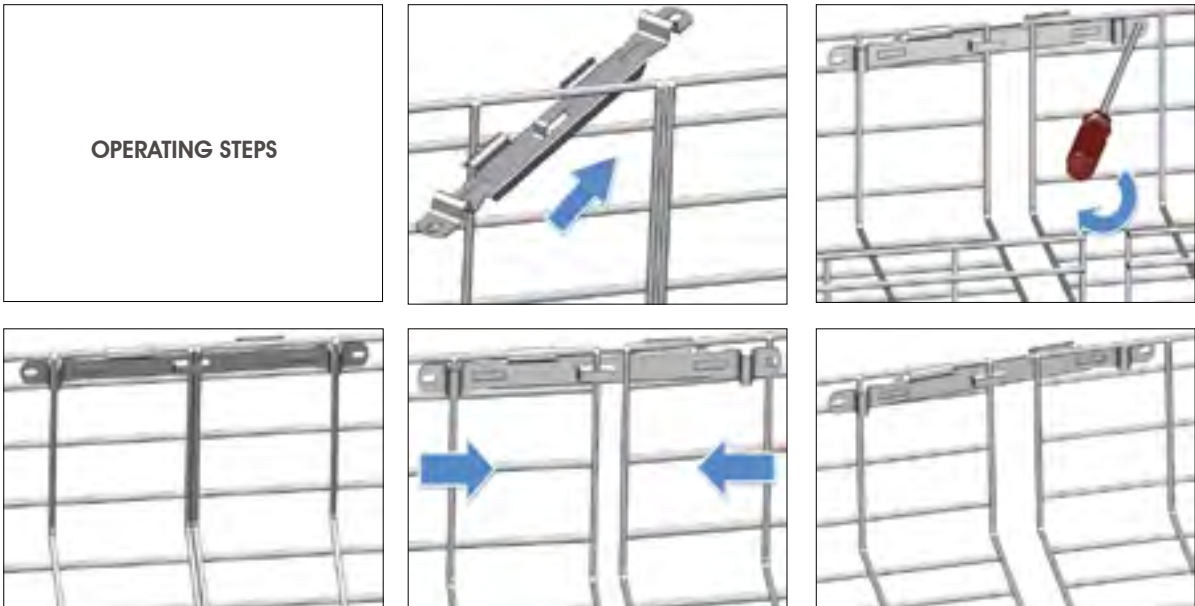

SPLICING

L CONNECTOR KIT

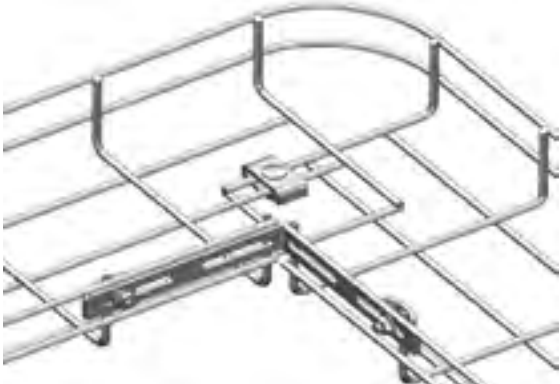


L CONNECTOR KIT INCLUDES A CONNECTOR,2X PART COUPLERS,TWO M6X20 CARRIAGE BOLTS AND TWO M6 FLANGE NUTS.

- ✓ For 90°turns or tee joins in horizontal direction.
- \$ Can be sold individually.



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
L CONNECTOR KIT	BFK051	BFK052	BFK053	BFK054	BFK055
L CONNECTOR	BF051	BF052	BF053	BF054	BF055
COUPER KIT	BFK011	BFK021	BFK031	BFK041	BFK051

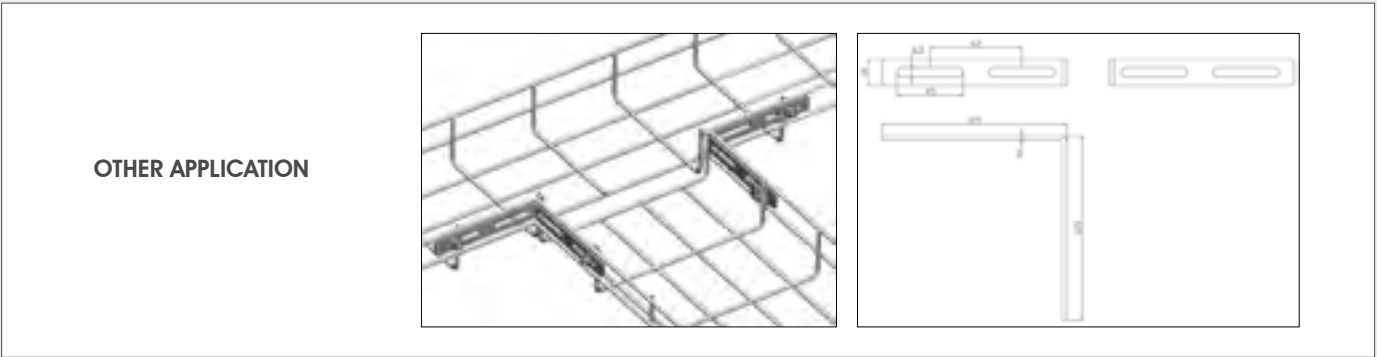

SNAP CLAMP



FOR STRAIGHT SECTION CONNECTIONS, QUICK AND EASY WITHOUT SCREW.


- \$ Can be sold individually.



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
SNAP CLAMP	BF071	BF072	BF073	BF074	BF075

SPLICING

R140 LINK SPAN KIT

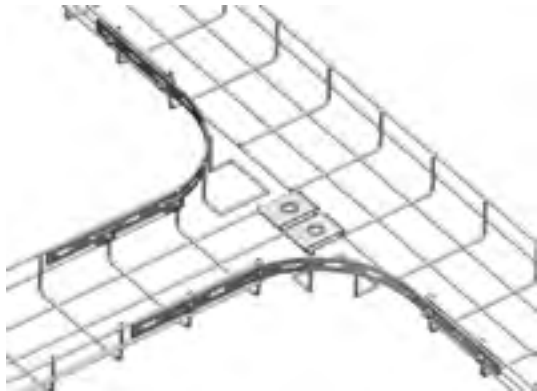

EASY INSTALLATION WHICH ELIMINATE THE USE OF SCREW, SAFE AND FIRM,ALSO APPLY TO CONNECT THE STRAIGHT SECTIONS WHICH NEEDS HIGH LOAD-BEARING CAPACITY WITH COUPLER KITS USED TOGETHER

\$ Can be sold individually.



Axis Coupler Kit




R140 Link Span Kit



R140 Link Span

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
H50 R140 LINK SPAN KIT	BFK111	BFK112	BFK113	BFK114	BFK115
H100 R140 LINK SPAN KIT	BFK121	BFK122	BFK123	BFK124	BFK125
H150 R140 LINK SPAN KIT	BFK131	BFK132	BFK133	BFK134	BFK135
H50 R140 LINK SPAN	BF111	BF112	BF113	BF114	BF115
H100 R140 LINK SPAN	BF121	BF122	BF123	BF124	BF125
H150 R140 LINK SPAN	BF131	BF132	BF133	BF134	BF135
COUPLER KIT	BFK011	BFK012	BFK013	BFK014	BFK015

R300 LINK SPAN KIT

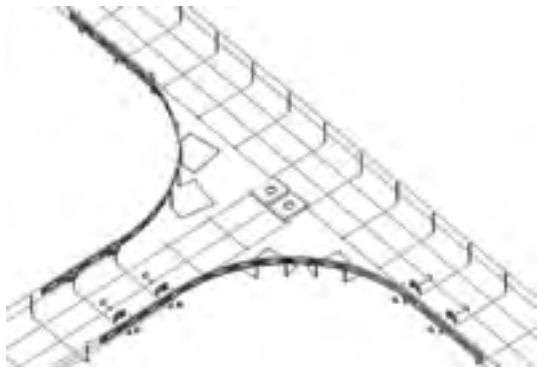

R300 LINK SPAN KIT INCLUDES A R300 LINK SPAN,FOUR AXIS COUPLER,FOUR M6X20 CARRIAGE BOLTS AND TWO M6 FLANGE NUTS.
FOR TEE OR CROSS JOINS IN HORIZONTAL DIRECTION, AND MINIMUM BENDING OF CABLES CAN BEGUARANTEED.

\$ Can be sold individually.



Axis Coupler Kit



R300 Link Span




R300 Link Span Kit

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
H50 R300 LINK SPAN KIT	BFK141	BFK142	BFK143	BFK144	BFK145
H100 R300 LINK SPAN KIT	BFK151	BFK152	BFK153	BFK154	BFK155
H150 R300 LINK SPAN KIT	BFK161	BFK162	BFK163	BFK164	BFK165
H50 R300 LINK SPAN	BF141	BF142	BF143	BF144	BF145
H100 R300 LINK SPAN	BF151	BF152	BF153	BF154	BF155
H150 R300 LINK SPAN	BF161	BF162	BF163	BF164	BF165

SPLICING

RADIUS SHIELD

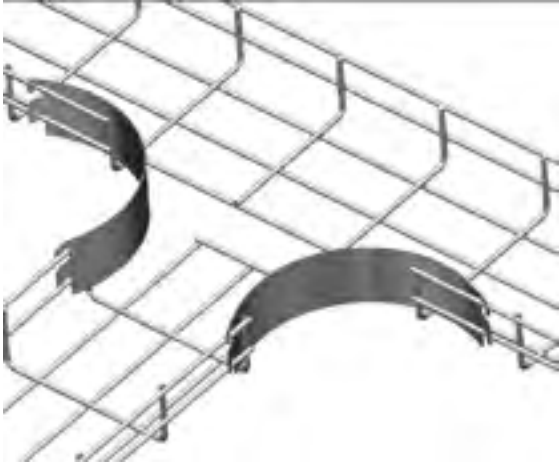

0.8MM METAL PLATE BENDS AND STUCKS IN THE SIDE OF STRAIGHT SECTION.
FOR TEE OR CROSS JOINS IN HORIZONTAL DIRECTION, QUICK AND EASY. USED TO NOT HIGH LOAD-BEARING CONNECTIONS.

\$ Can be sold individually.




Radius Shield



Radius Shield

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
H50 Arc Baffle	BF171	BF172	BF173	BF174	BF175
H100 Arc Baffle	BF181	BF182	BF183	BF184	BF185
H150 Arc Baffle	BF191	BF192	BF193	BF194	BF195

AXIS COUPLER KIT

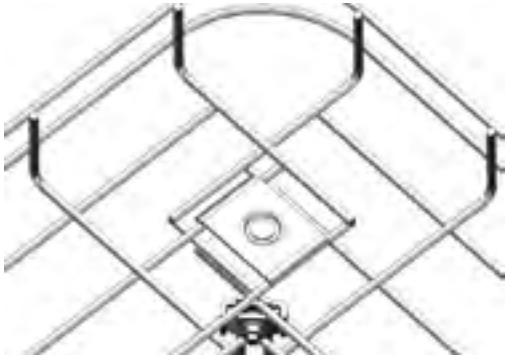

AXIS COUPLER KIT INCLUDES TWO AXIS COUPLER,A M6X20 CARRIAGE BOLT AND A M6 FLANGE NUT.

✓ For straight section connect with different angles, also used for hanging support.


\$ Can be sold individually.



Axis Coupler Kit

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
AXIS COUPLER KIT	BF061	BF062	BF063	BF064	BF065

OTHER APPLICATION

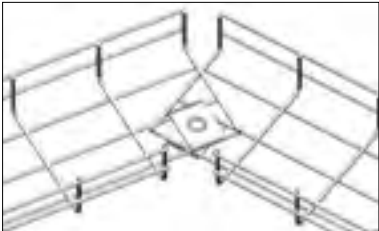

WALL MOUNTING

WALL T-BRACKET



- ▲ Used to mount to wall with expansion bolt.
- ✓ Ensure the distance between the wall
- ✓ Can be use to construct multi-storey bridge.
- ✓ Matching the arm- length with the width of the wire tray.
- \$ Can be sold individually.



Axis Coupler Kit



R140 Link Span


ITEM NAME	WIRE TRAY WIDTH	BRACKET LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 W100 WALL T-BRACKET	100	160	BF611	BF612	BF613	BF614	BF615
W150 W150 WALL T-BRACKET	150	210	BF621	BF622	BF623	BF624	BF625
W200 W200 WALL T-BRACKET	200	260	BF631	BF632	BF633	BF634	BF635
W300 W 300 WALL T-BRACKET	300	360	BF641	BF642	BF643	BF644	BF645
W400 W400 WALL T-BRACKET	400	460	BF651	BF652	BF653	BF654	BF655

WALL MOUNTING




WALL M-BRACKET



- ★ High supporting strength.
- ▲ Used to mount to wall with expansion bolt.
- ✓ Ensure the distance between the wall
- ✓ Can be use to construct multi-storey bridge.
- ✓ Matching the arm- length with the width of the wire tray .
- \$ Can be sold individually.




ITEM NAME	WIRE TRAY WIDTH	BRACKET LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 WALL M-BRACKET	100	160	BF661	BF662	BF663	BF664	BF665
W150 WALL M-BRACKET	150	210	BF671	BF672	BF673	BF674	BF675
W200 WALL M-BRACKET	200	260	BF681	BF682	BF683	BF684	BF685
W300 WALL M-BRACKET	300	360	BF691	BF692	BF693	BF694	BF695
W400 WALL M-BRACKET	400	460	BF701	BF702	BF703	BF704	BF705

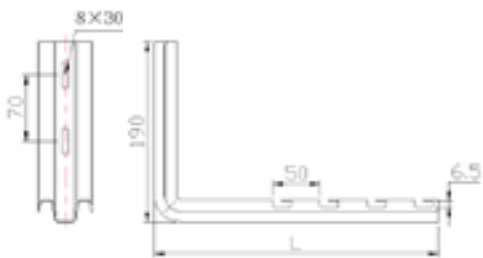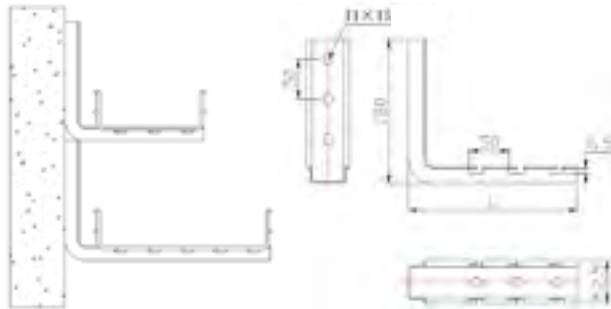


WALL MOUNTING



TRIANGLE T BRACKET

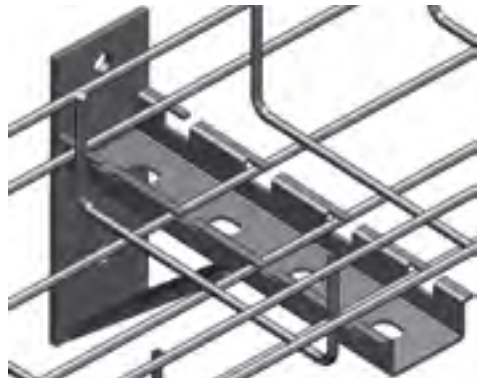

- ▲ Weld assembly, used to mount to wall with expansion bolt.
- ✓ Matching the arm- length with the width of the wire tray .
- \$ Can be sold individually.

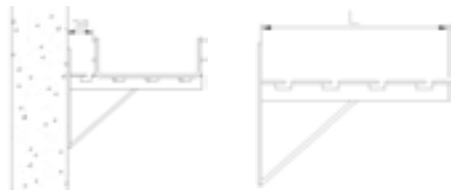

ITEM NAME	WIRE TRAY WIDTH	BRACKET LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 TRIANGLE T-BRACKET	100	150	BF711	BF712	BF713	BF714	BF715
W150 TRIANGLE T-BRACKET	150	200	BF721	BF722	BF723	BF724	BF725
W200 TRIANGLE T-BRACKET	200	250	BF731	BF732	BF733	BF734	BF735
W300 TRIANGLE T-BRACKET	300	350	BF741	BF742	BF743	BF744	BF745

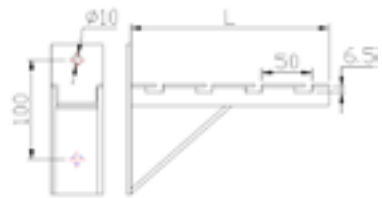


SPIDER BRACKET



- ▲ Provide a variety of screw position.Expansion screws can be increased or decrease according to the need.
- ▲ Applied to a variety of installation environment.
- ✓ Only needs 100mm installation space, and more suitable for small space.
- \$ Can be sold individually



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
SPIDER BRACKET	BF531	BF532	BF533	BF534	BF535

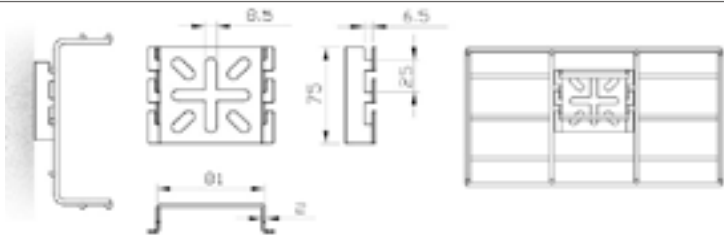


WALL MOUNTING


TRIANGLE-N-BRACKET



- ▲ Provide a variety of screw position.Expansion screws can be increased or decrease according to the need.
- ✓ Matching the arm- length with the width of the wire tray .
- \$ Can be sold individually.

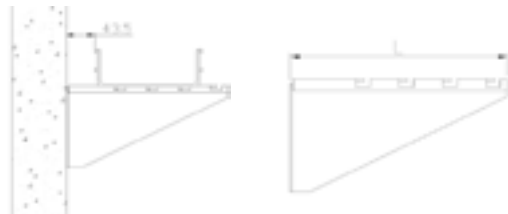

ITEM NAME	WIRE TRAY WIDTH	BRACKET LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 TRIANGLE N-BRACKET	100	200	BF761	BF762	BF763	BF764	BF765
W150 TRIANGLE N-BRACKET	150	250	BF771	BF772	BF773	BF774	BF775
W200 TRIANGLE N-BRACKET	200	300	BF781	BF782	BF783	BF784	BF785
W300 TRIANGLE N-BRACKET	300	400	BF791	BF792	BF793	BF794	BF795
W400 TRIANGLE N-BRACKET	400	500	BF801	BF802	BF803	BF804	BF805

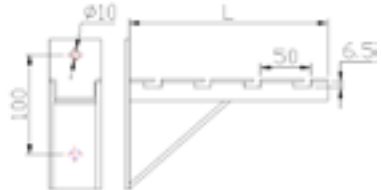


SIDE BRACKET



- ▲ Can put the wire tray near the wall fixed.
- ✓ Suitable for small width and load Lighter wire tray.
- \$ Can be sold individually.




ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
HORN BRACKET	BF541	BF542	BF543	BF544	BF545

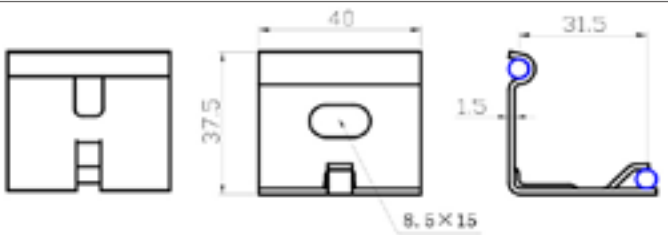

CEILING MOUNTING

T-SUSPENSION BAR

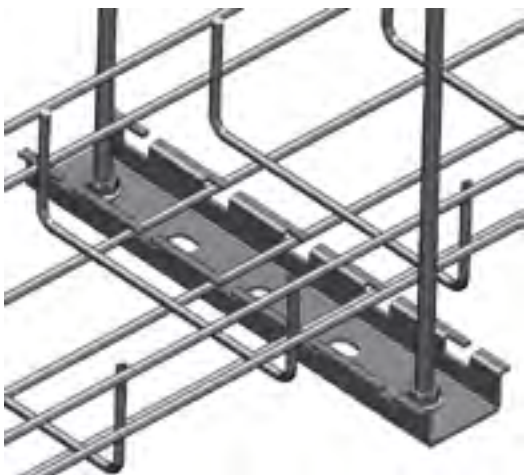

FIX THE WIRE TRAY ON THE THREADED ROD WITH NUTS, HANGING FROM THE CEILING. MATCHING LENGTH OF SUSPENSION BAR WITH WIDTH OF WIRE TRAY ($L=W + 80$).

- Fits max M10 threaded rod.
- Support without screw, Fixed with bending protrusion.
- \$ Can be sold individually.



ITEM NAME	WIRE TRAY WIDTH	SUSPENSION BAR LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 T-SUSPENSION BAR	100	180	BF211	BF212	BF213	BF214	BF215
W200 T-SUSPENSION BAR	200	280	BF221	BF222	BF223	BF224	BF225
W300 T-SUSPENSION BAR	300	380	BF231	BF232	BF233	BF234	BF235
W400 T-SUSPENSION BAR	400	480	BF241	BF242	BF243	BF244	BF245
W500 T-SUSPENSION BAR	500	580	BF251	BF252	BF253	BF254	BF255
W600 T-SUSPENSION BAR	600	680	BF261	BF262	BF263	BF264	BF265

CEILING MOUNTING

M-SUSPENSION BAR




FIX THE WIRE TRAY ON THE THREADED ROD WITH NUTS, HANGING FROM THE CEILING. MATCHING LENGTH OF TRAPEZE WITH WIDTH OF WIRE TRAY ($L=W + 80$).

- ★ Supporting strength is higher than T-trapeze
- Fits max M10 threaded rod.
- Support without screw, Fixed with bending protrusion.
- \$ Can be sold individually.




ITEM NAME	WIRE TRAY WIDTH	SUSPENSION BAR LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 M-SUSPENSION BAR	100	180	BF311	BF312	BF313	BF314	BF315
W200 M-SUSPENSION BAR	200	280	BF321	BF322	BF323	BF324	BF325
W300 M-SUSPENSION BAR	300	380	BF331	BF332	BF333	BF334	BF335
W400 M-SUSPENSION BAR	400	480	BF341	BF342	BF343	BF344	BF345
W500 M-SUSPENSION BAR	500	580	BF351	BF352	BF353	BF354	BF355
W600 M-SUSPENSION BAR	600	680	BF361	BF362	BF363	BF364	BF365

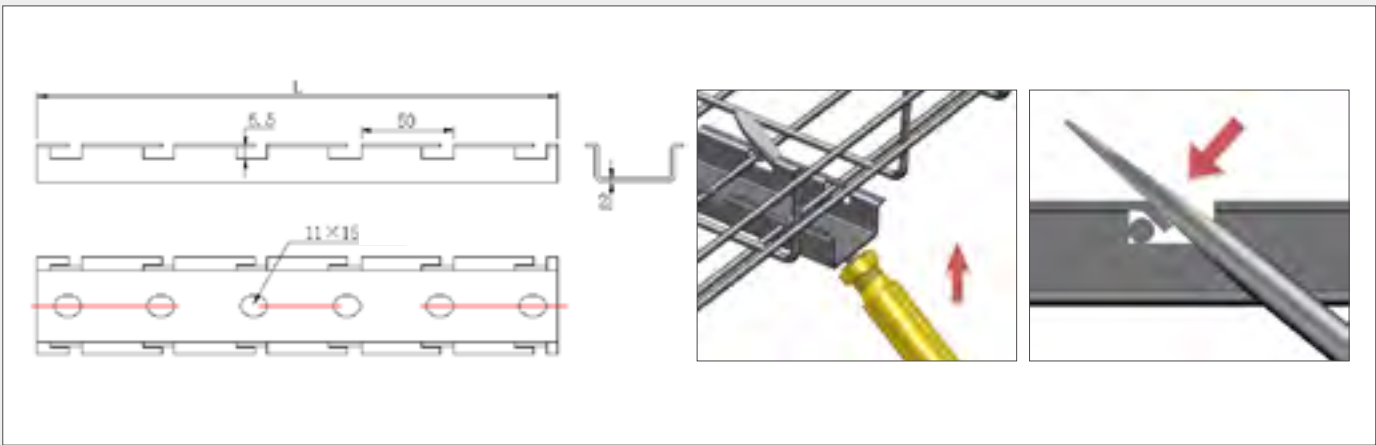


CEILING MOUNTING

C-CHANNEL STRUT

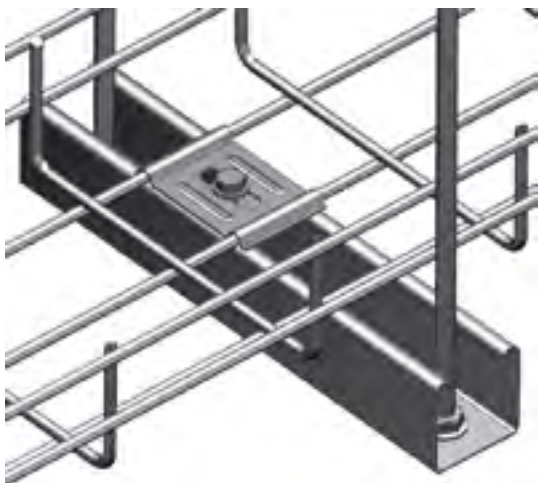

MOUNTING THE WIRE TRAY BY USING THREADED ROD WITH HOLD DOWN PLATE, HANGING FROM THE CEILING. MATCHING LENGTH OF TRAPEZE WITH WIDTH OF WIRE TRAY (L=W + 80).

- Fits max M10 threaded rod.
- Can be sold individually.

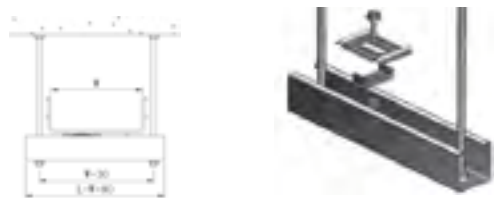

holder down plate




C-channel strut




- Studded Plate
- Flange Bolt
- Flange Nut

ITEM NAME	WIRE TRAY WIDTH	TRAPEZE LENGTH	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
C-Channel strut			BF081	BF082	BF083	BF084	BF085
W100 C-Channel Strut	100	180	BF411	BF412	BF413	BF414	BF415
W200 C-Channel Strut	200	280	BF421	BF422	BF423	BF424	BF425
W300 C-Channel Strut	300	380	BF431	BF432	BF433	BF434	BF435
W400 C-Channel Strut	400	480	BF441	BF442	BF443	BF444	BF445
W500 C-Channel Strut	500	580	BF451	BF452	BF453	BF454	BF455
W600 C-Channel Strut	600	680	BF461	BF462	BF463	BF464	BF465
Studded plate			BF011	BF012	BF013	BF014	BF015
M6*20 Flange Bolt			T111	-	-	T114	T115
M6 Flange Nut			T211	-	-	T214	T215

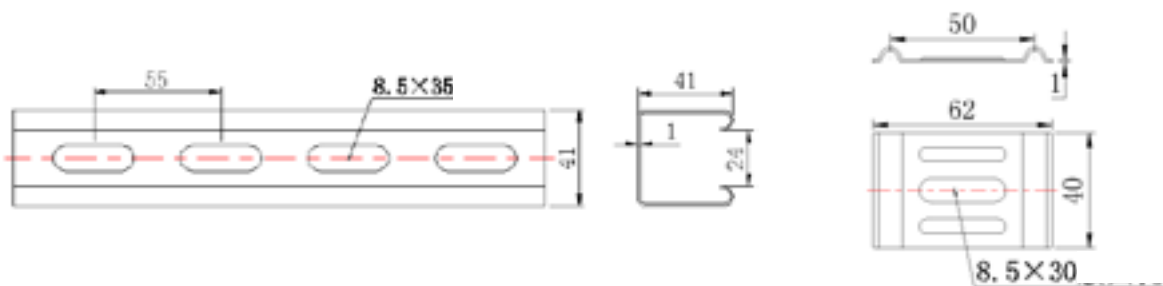

CEILING MOUNTING

50 HANGER

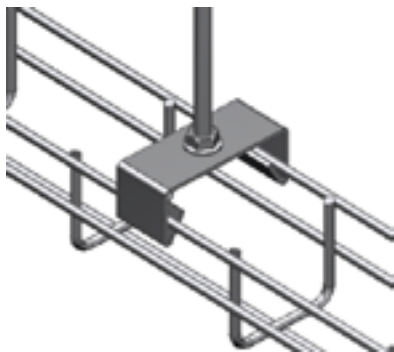


HANG THE WIRE TRAY WITH 50 HANGER, USED TO HANGING FROM THE CEILING. ONLY FOR WIDTH 50MM WIRE TRAY, SCREWLESS INSTALLATION. FIXED WITH BENDING HOOK.

- Can be sold individually.



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
50 HANGER	BF501	BF502	BF503	BF504	BF505

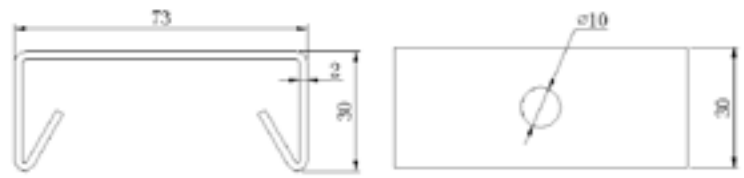


HANGING CLIP



- Needs two hanging clips to install.
- Used to max 300mm Width wire tray.
- Suitable for M6, M8, M10 threaded rod.
- Fixed with bending hook.
- Can be sold individually.



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
HANGING CLIP	BF511	BF512	BF513	BF514	BF515

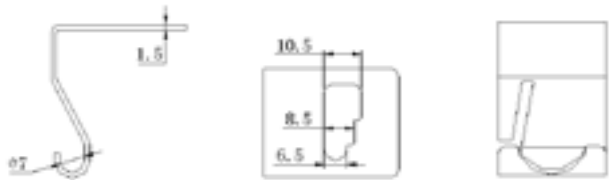

CEILING MOUNTING

AXIS COUPLER



FIXED WITH TWO FLANGE NUTS ON THREADED ROD, HANGING FROM THE CEILING. NEEDS PVC SOCKETS TO PROTECT THE CABLE.




- ✓ Can be used as connector.
- \$ Can be sold individually.




PVC SOCKETS

AXIS COUPLER

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
AXIS COUPLER	BF061	BF062	BF063	BF064	BF065
PVC SOCKETS	T91				

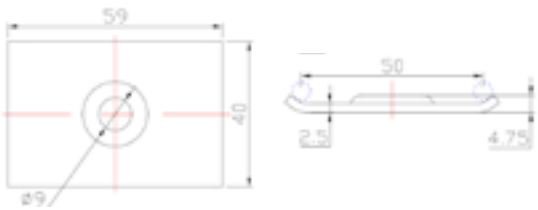

PENDANT DROP

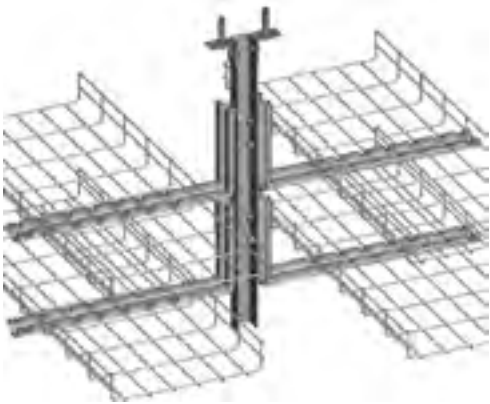

USED TO HANGING FROM THE CEILING, WITH TWO L-CLIPS, TWO EXPANSION BOLTS, TWO M8X14 HEX FLANGE SCREW AND TWO HEX FLANGE NUTS.

ADJUSTABLE HEIGHT, AND COOPERATE WITH A VARIETY OF SUPPORTING CAN BE USED TO CEILING OR GROUND MOUNTING.



- \$ Can be sold individually.



L-Clip


Pendant Drop

ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
PENDANT DROP	BF521	BF522	BF523	BF524	BF525
L-CLIP	BF531	BF532	BF533	BF534	BF535

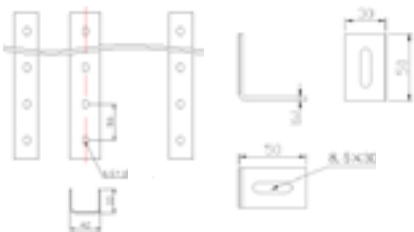

UNDERFLOOR MOUNTING


50 STAND BRACKET

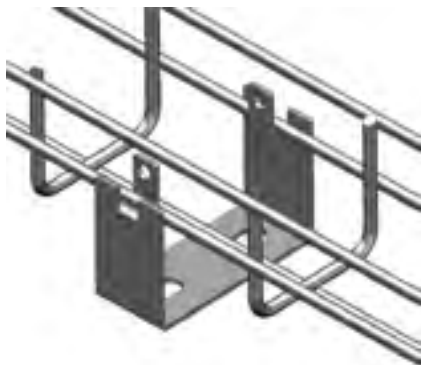



ONLY FOR 50MM WIDTH WIRE TRAY, ALSO APPLICABLE TO THE TOP OF THE CABINET. SUPPORT WITHOUT SCREW, FIXED WITH BENDING PROTRUSION.

- Range 13mm from the ground.


- \$ Can be sold individually.



ITEM NAME	Electroplate	HDG	Powder Coating	304 Stainless Steel	316L Stainless Steel
50 Stand Bracket	BF811	BF812	BF813	BF814	BF815



STAND T-BRACKET

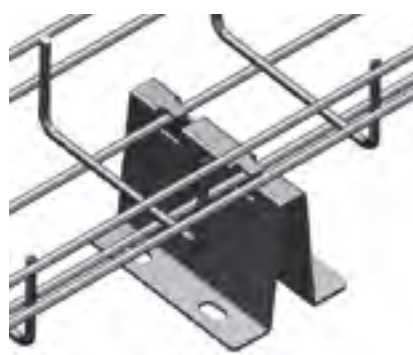

CAN BE DIRECTLY FIXED ON THE GROUND WITH SCREWS.

- Support without screw, Fixed with bending protrusion.


- Range 63mm from the ground.

- ✓ Type and width of wire tray matching.

- \$ Can be sold individually.



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
W100 STAND T-BRACKET	BF821	BF822	BF823	BF824	BF825
W150 STAND T-BRACKET	BF831	BF832	BF833	BF834	BF835
W200 STAND T-BRACKET	BF841	BF842	BF843	BF844	BF845

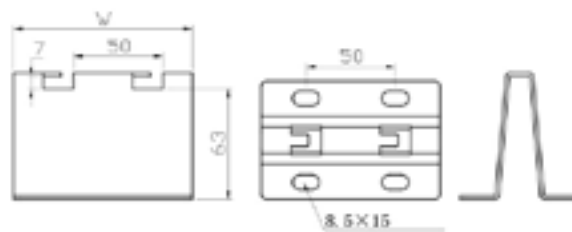

UNDERFLOOR MOUNTING

BRIDGE STAND BRACKET KIT



BRIDGE STAND BRACKET KIT INCLUDES A T-T-SUSPENSION BAR ,TWO M8X16 HEX FLANGE BOLTS AND TWO M8 HEX FLANGE NUTS.
THE WIDTH 100MM-600MM WIRE TRAY AND THE T-T-SUSPENSION BARMATCHING.


The width 100mm-600mm wire tray and the T-suspension bar matching.

Support without screw, Fixed with bending protrusion.

\$ Can be sold individually.



ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
H50 BRIDGE STAND BRACKET KIT	BFK211	BFK212	BFK213	BFK214	BFK215
H100 BRIDGE STAND BRACKET KIT	BFK221	BFK222	BFK223	BFK224	BFK225
H150 BRIDGE STAND BRACKET KIT	BFK231	BFK232	BFK233	BFK234	BFK235
H200 BRIDGE STAND BRACKET KIT	BFK241	BFK242	BFK243	BFK244	BFK245
T-SUPPORTING FOOT	BF901	BF902	BF903	BF904	BF905
M8 HEX FLANGE BOLT	T511	-	-	T514	T515
M8 HEX FLANGE NUT	T611	-	-	T614	T615
W100 T-SUSPENSION BAR	BF211	BF212	BF213	BF214	BF215
W200 T-SUSPENSION BAR	BF221	BF222	BF223	BF224	BF225
W300 T-SUSPENSION BAR	BF231	BF232	BF233	BF234	BF235
W400 T-SUSPENSION BAR	BF241	BF242	BF243	BF244	BF245
W500 T-SUSPENSION BAR	BF251	BF252	BF253	BF254	BF255
W600 T-SUSPENSION BAR	BF261	BF262	BF263	BF264	BF265

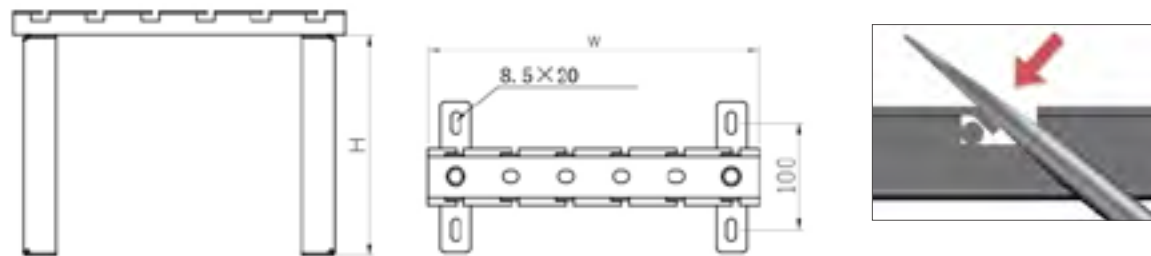

UNDERFLOOR MOUNTING

U-PILLAR



USED TO FIXED ON THE GROUND, WITH TWO L-CLIPS ,TWO EXPANSION BOLTS,TWO M8X14 HEX FLANGE SCREW AND TWO HEX FLANGE NUTS.
ADJUSTABLE HEIGHT,AND COOPERATE WITH A VARIETY OF SUPPORTING CAN BE USED TO CEILING OR GROUND MOUNTING.


\$ Can be sold individually.




ITEM NAME	ELECTROPLATE	HDG	POWDER COATING	304 STAINLESS STEEL	316L STAINLESS STEEL
U-PILLAR	BF521	BF522	BF523	BF524	BF525
L-CLIPS	BF531	BF532	BF533	BF534	BF535



OTHER APPLICATION

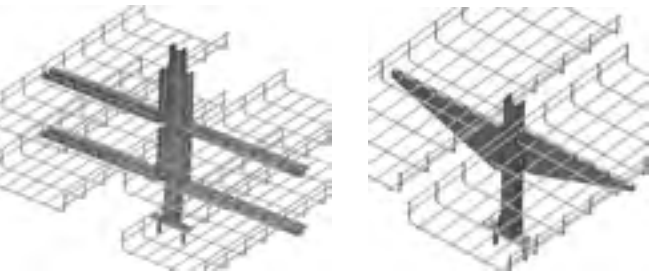

SPIDER BRACKET

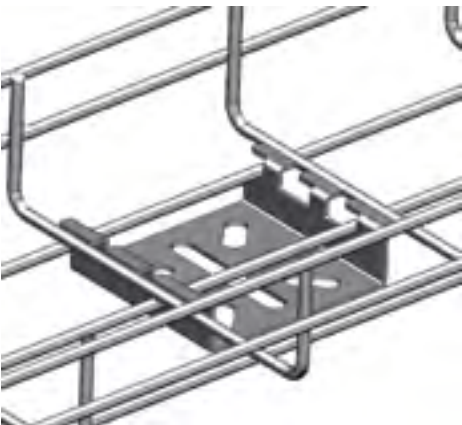


PROVIDE A VARIETY OF SCREW POSITION.EXPANSION SCREWS CAN BE INCREASED OR DECREASE ACCORDING TO THE NEED.

Applied to a variety of installation environment.


Only needs 100mm installation space, and more suitable for small space.

\$ Can be sold individually.

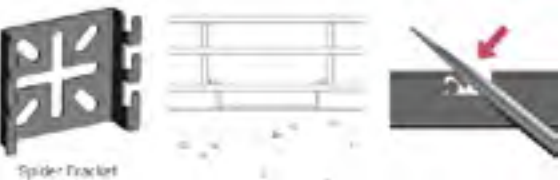

ITEM NAME	Electroplate	HDG	Powder Coating	304 Stainless Steel	316L Stainless Steel
SPIDER BRACKET	BF531	BF532	BF533	BF534	BF535


CABLE EXIT CLIP

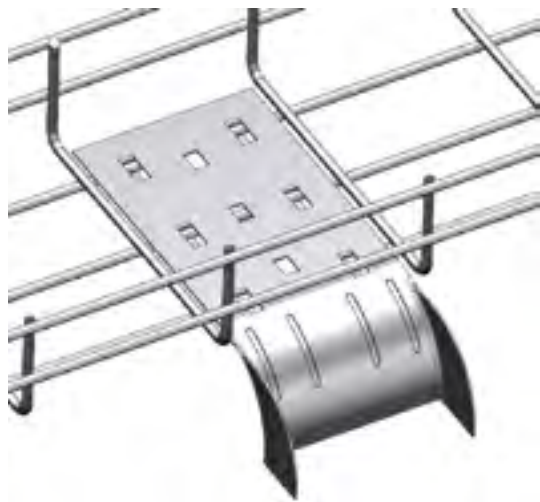

- ✓ Can be in any position leading cable out.
- ✿ Fixed by simply click, 40mm radius bend for better cable protection.
- \$ Can be sold individually.




ITEM NAME	Electroplate	HDG	Powder Coating	304 Stainless Steel	316L Stainless Steel
W45 Cable Exit Clip	BF911	BF912	BF913	BF914	BF915
W90 Cable Exit Cliop	BF921	BF922	BF923	BF924	BF925

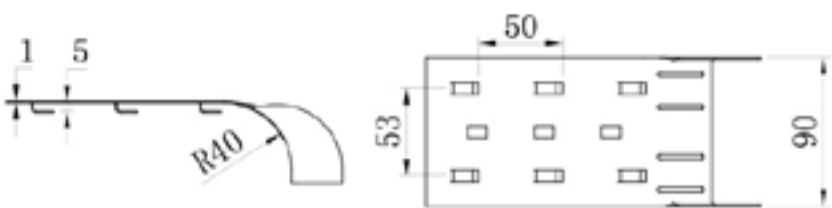

T JUNCTIONS MODE 1






X 2






X 8




4" (100 mm)

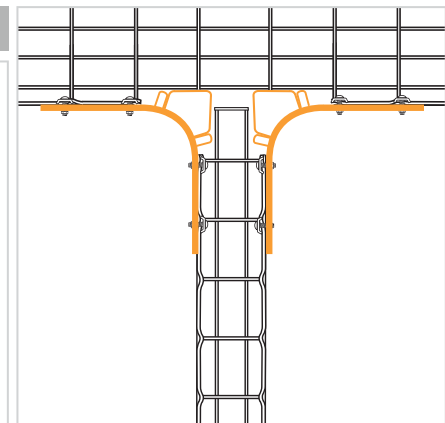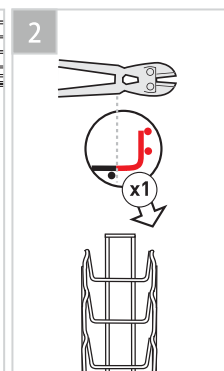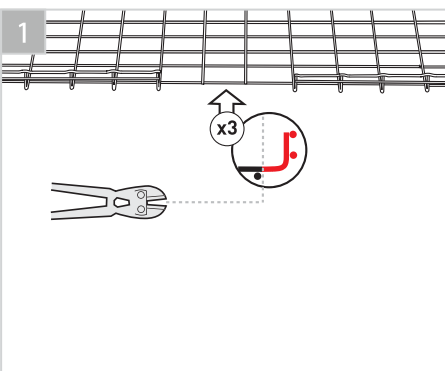

8" (200 mm)

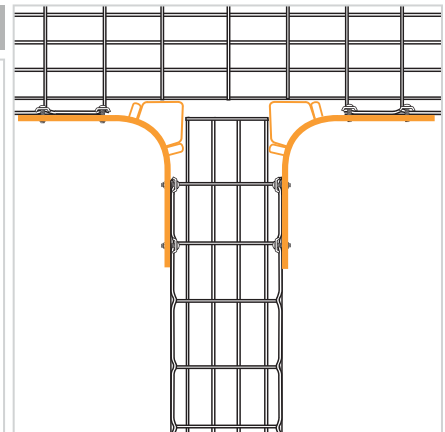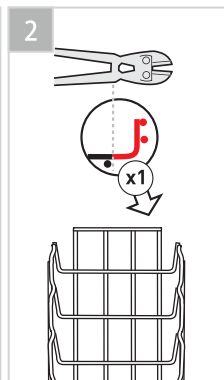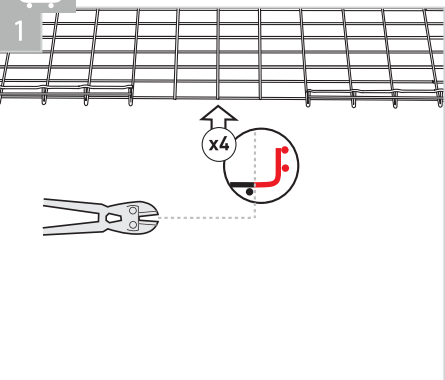


24" (600 mm)

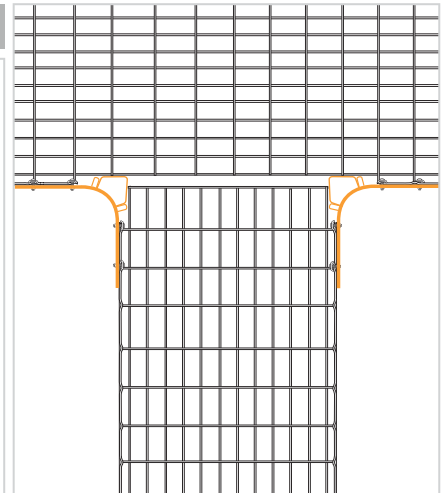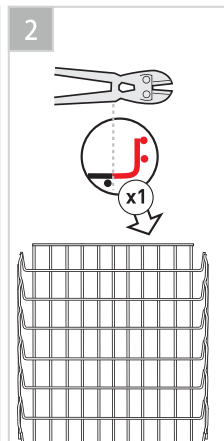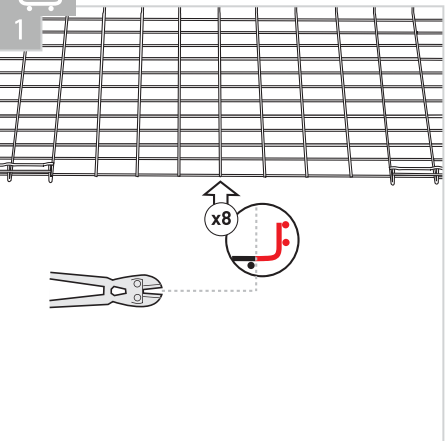

FABRICATIONS


T JUNCTIONS

MODE 2

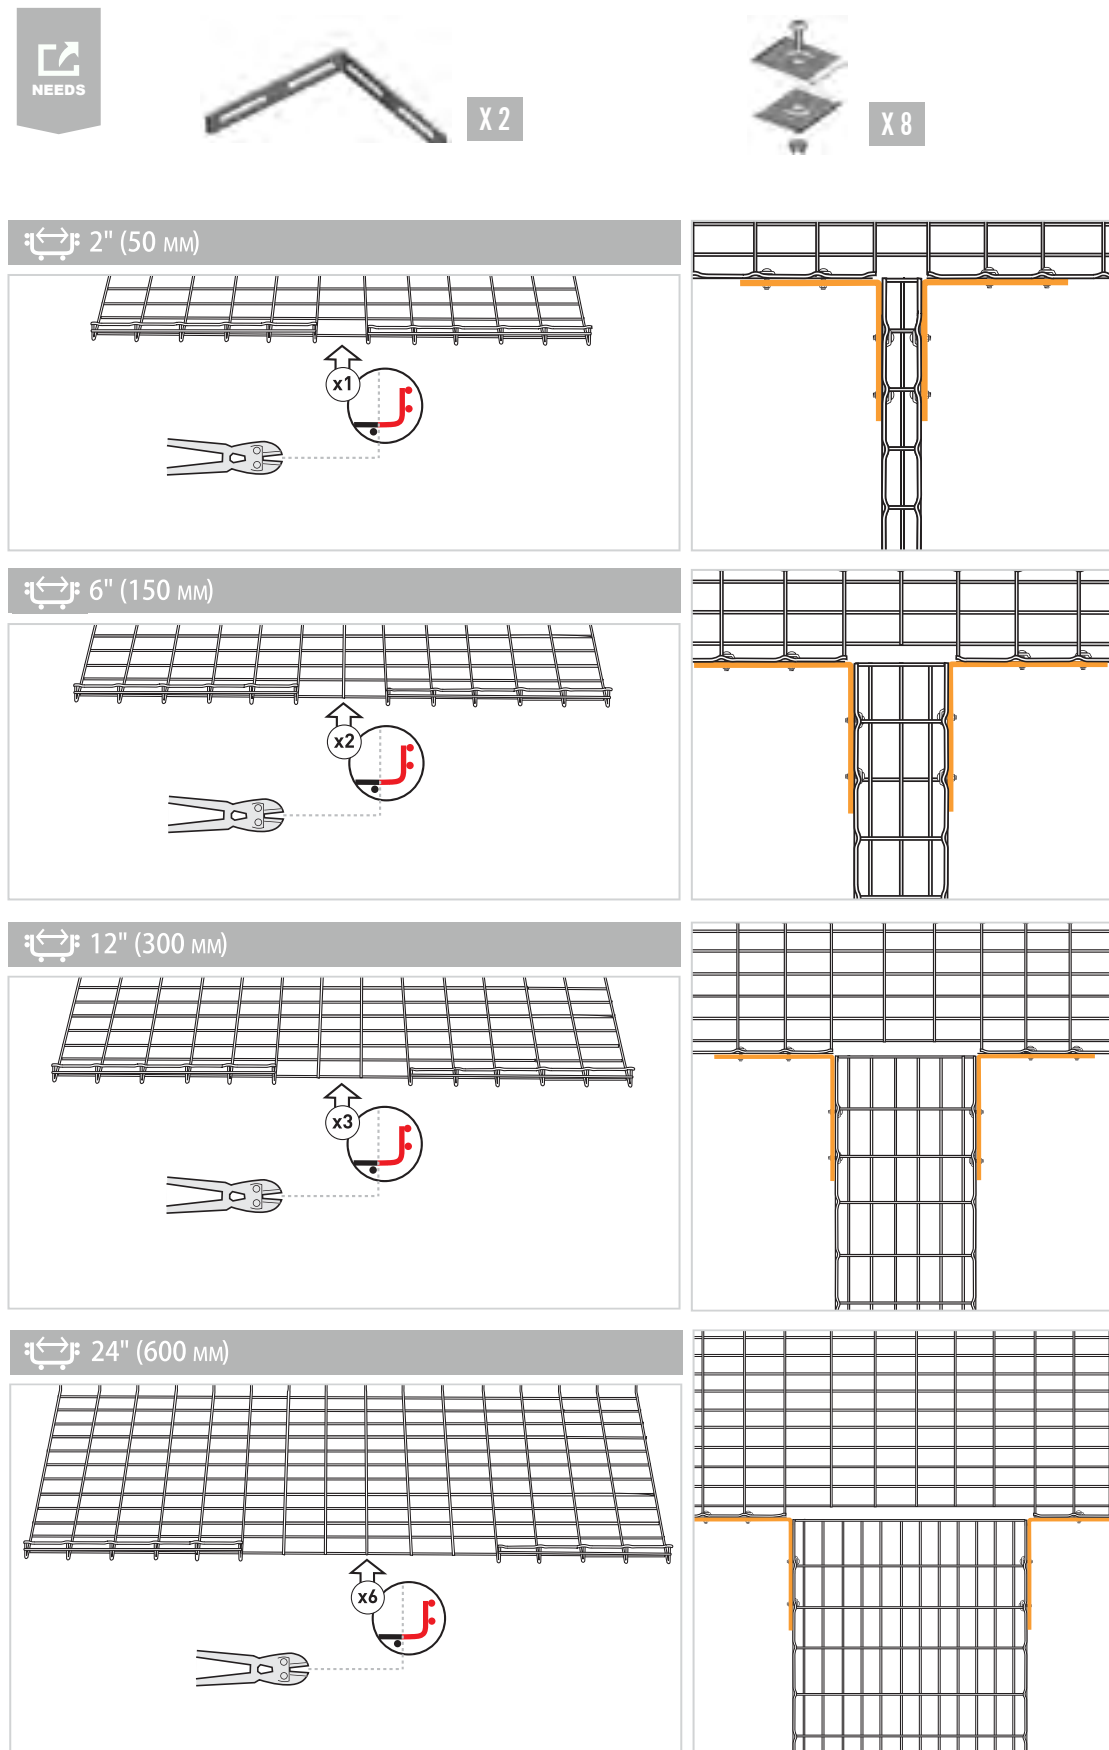

FABRICATIONS

Y JUNCTIONS

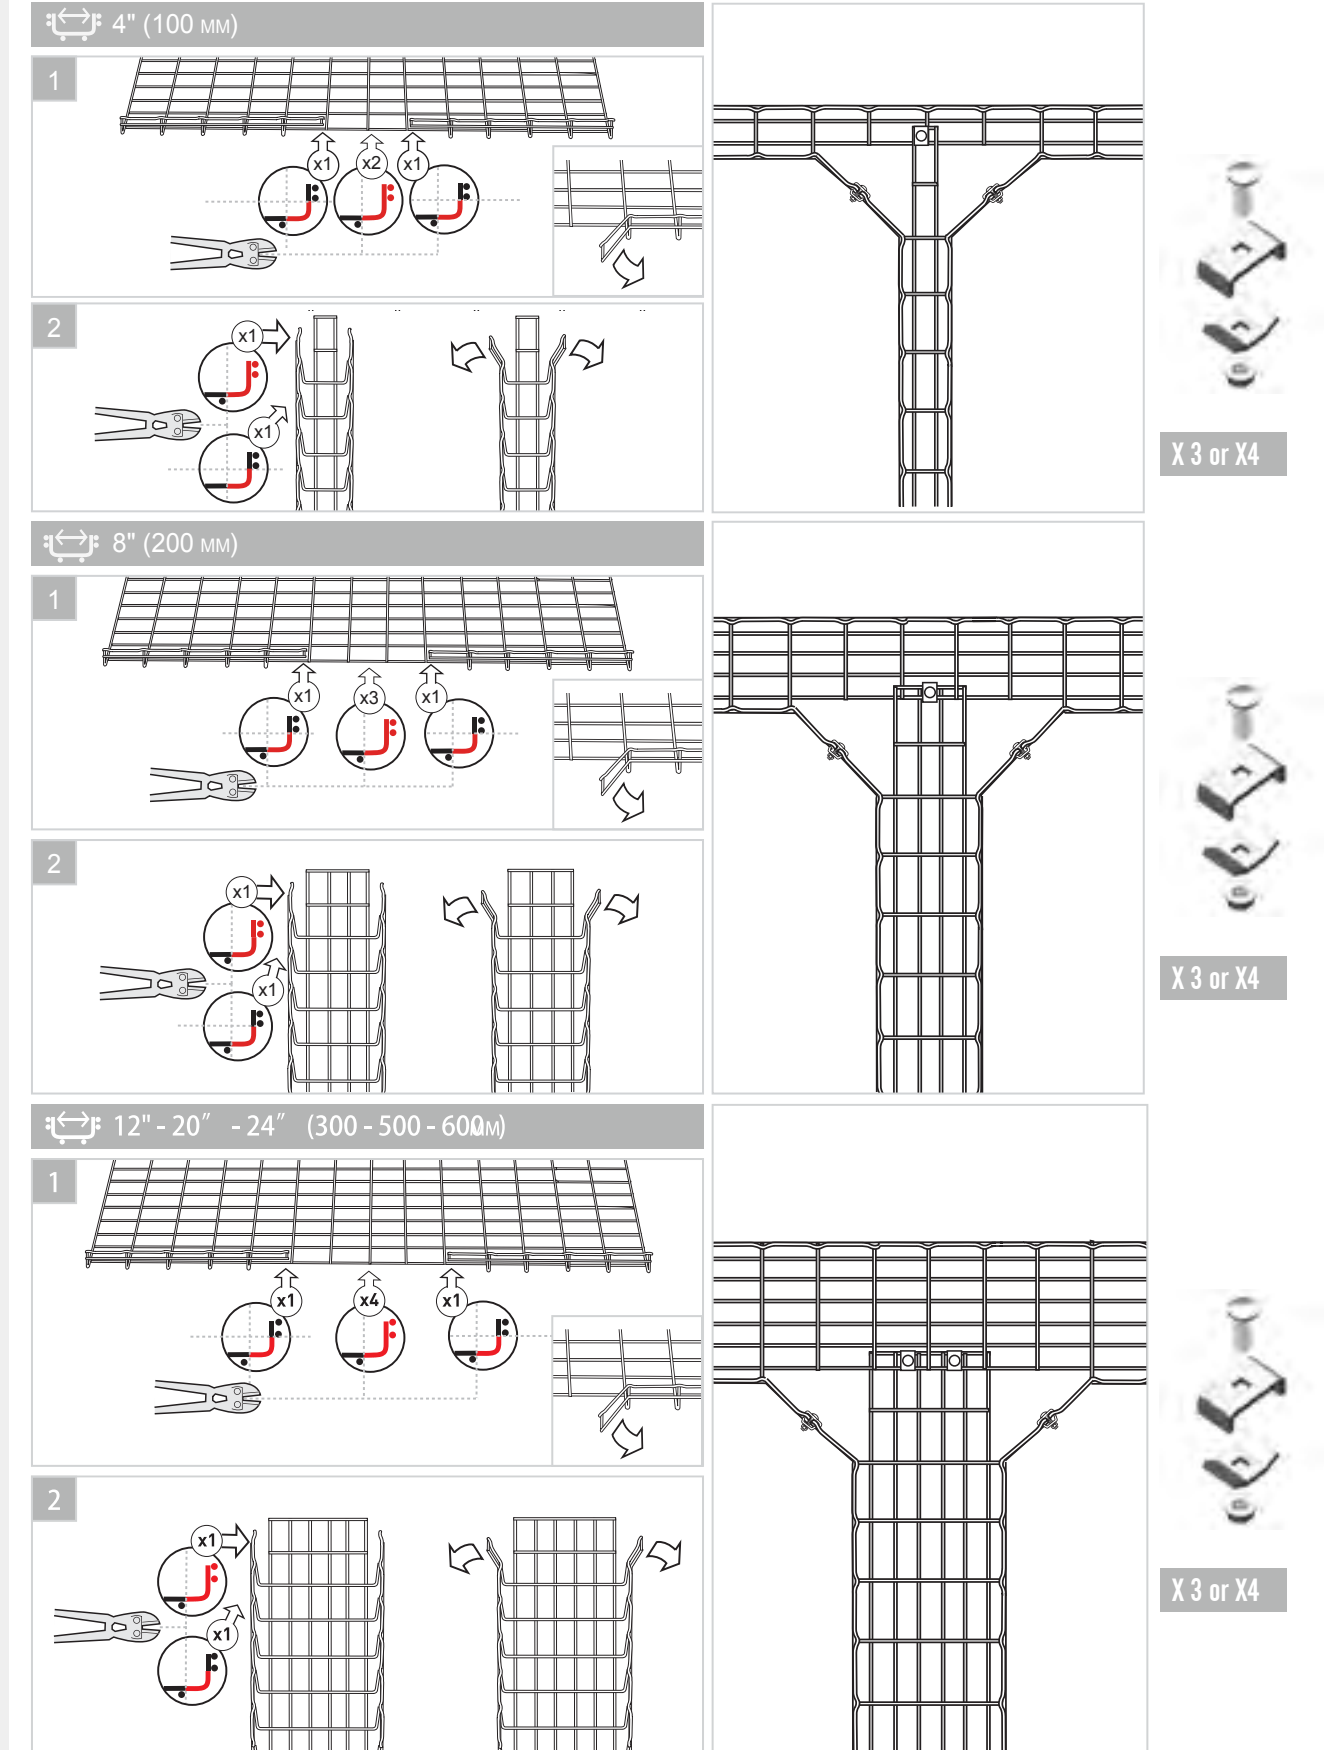

FABRICATIONS

90° BENDS

MODE 1





X1





X1



4" (100 mm)

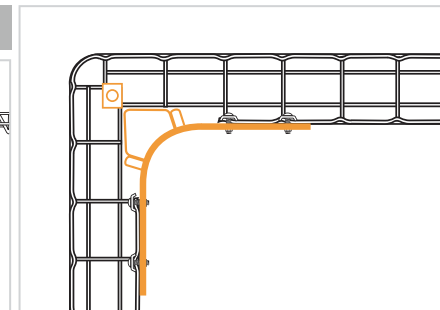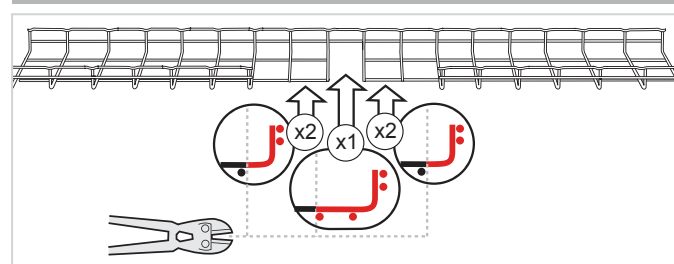

6" (150 mm)

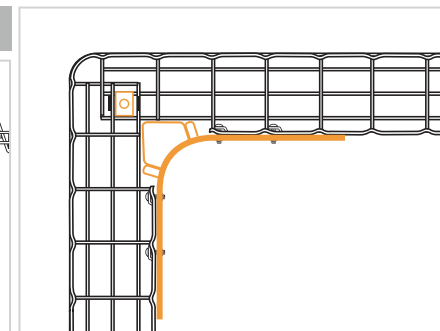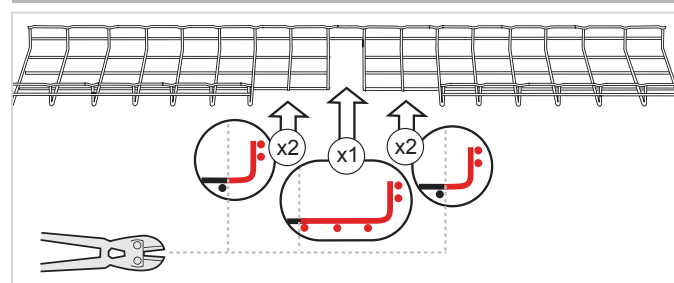


8" (200 mm)

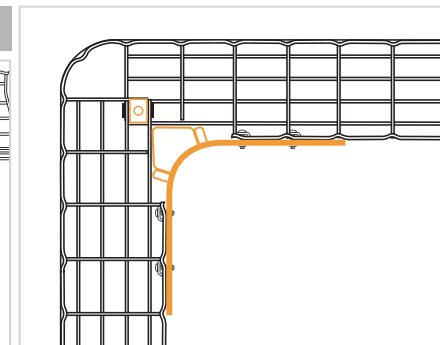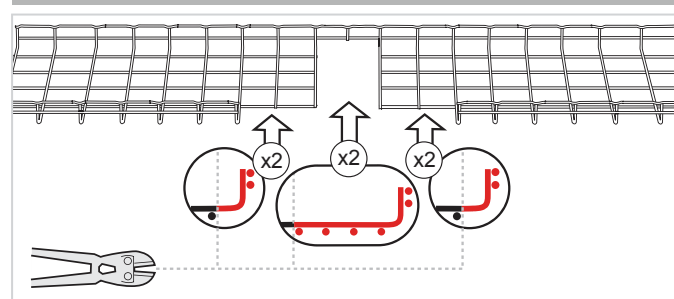

FABRICATIONS

90° BENDS

MODE 1





X1





X1



12" (300 mm)

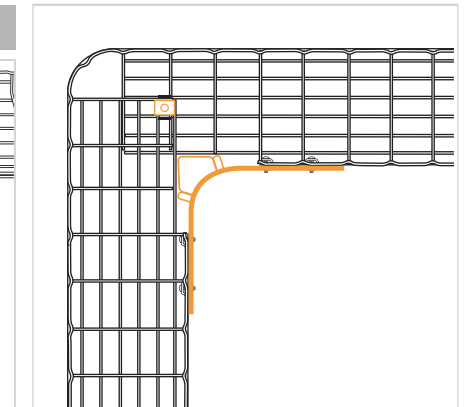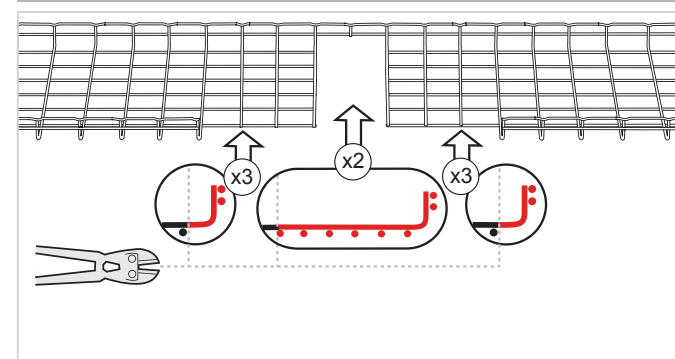

20" (500 mm)

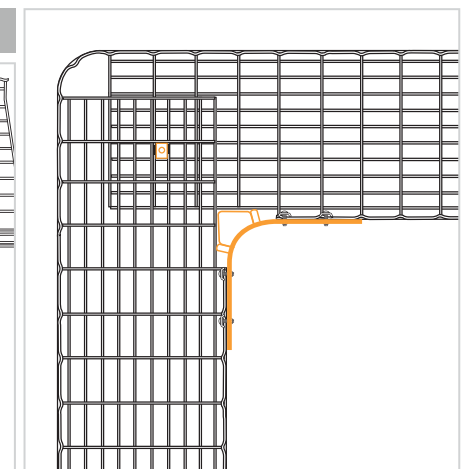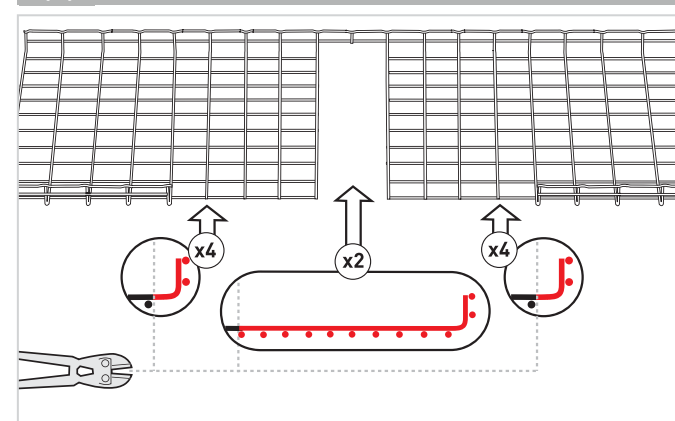

24" (600 mm)

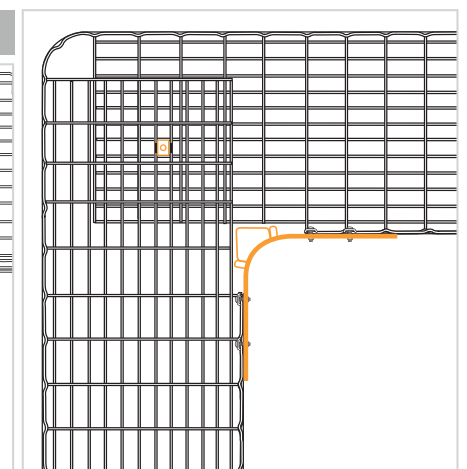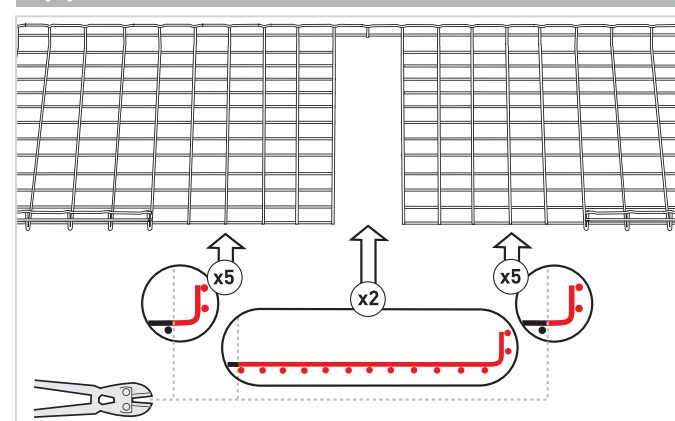

FABRICATIONS

90° BENDS



MODE 2





NEEDS





2" (50 mm)

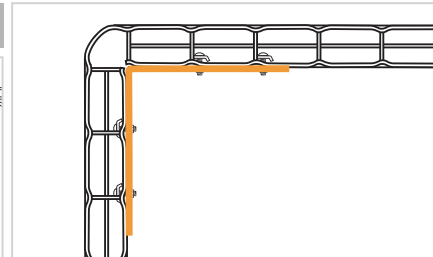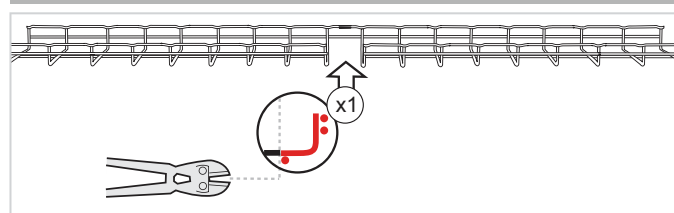



4" (100 mm)

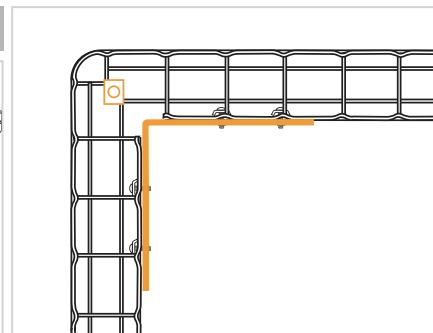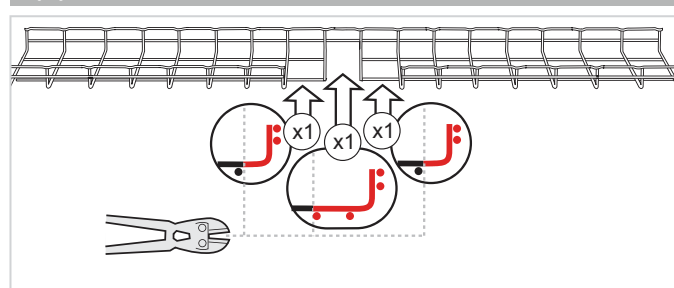

6" (150 mm)

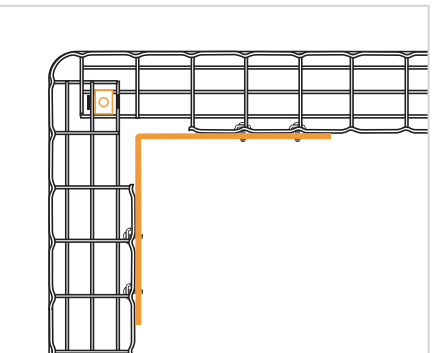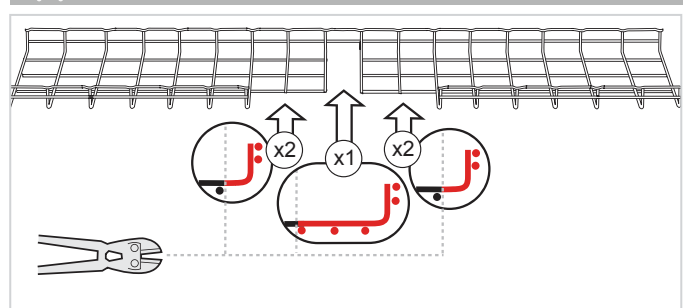

8" (200 mm)

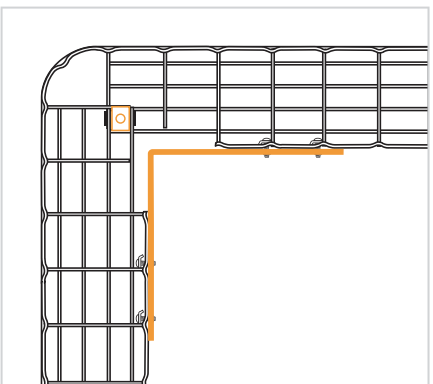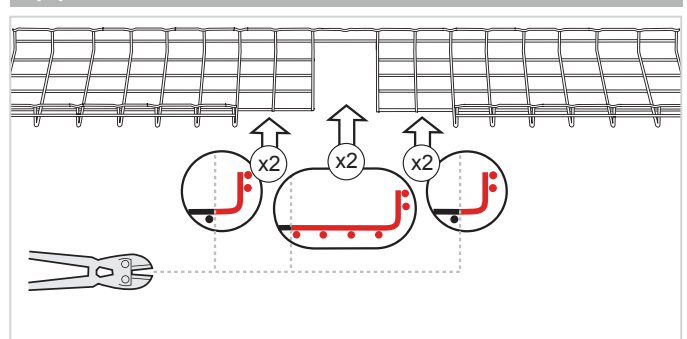

FABRICATIONS

90° BENDS



MODE 2





NEEDS





12" (300 mm)

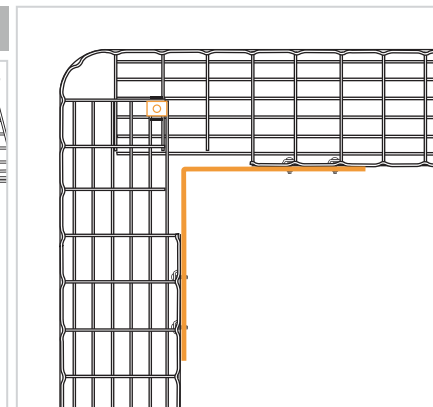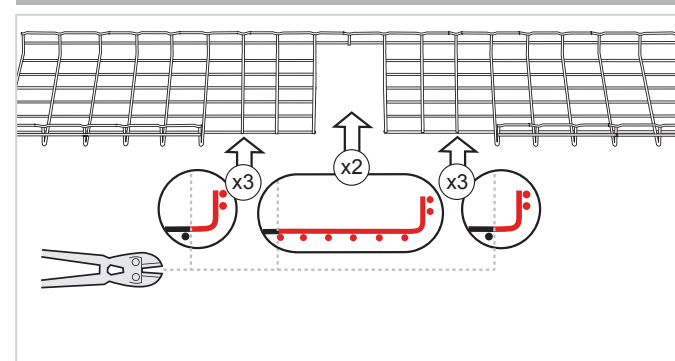

20" (500 mm)

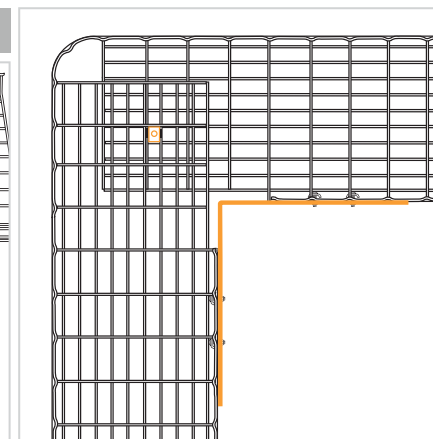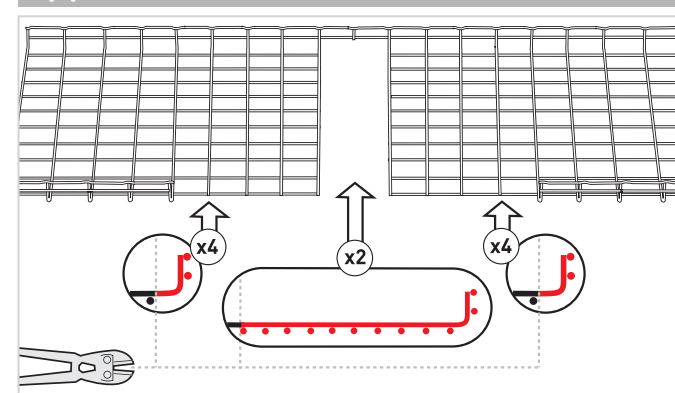

24" (600 mm)

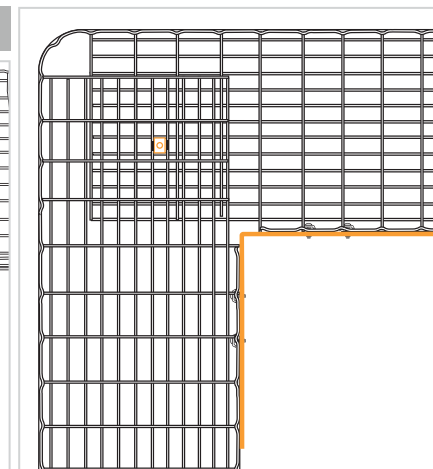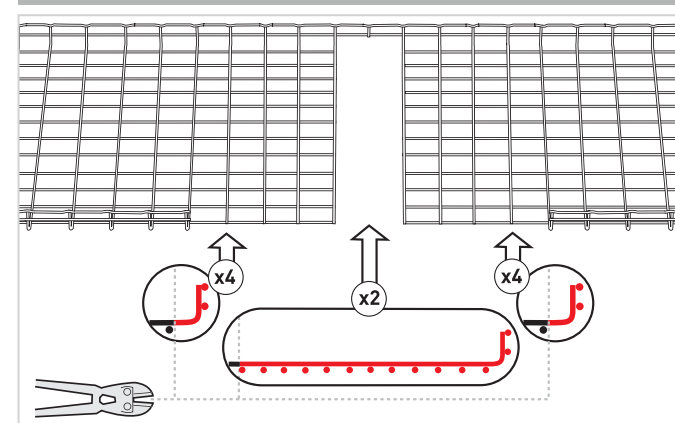


FABRICATIONS



90° JUNCTIONS





NEEDS





4" (100 mm)

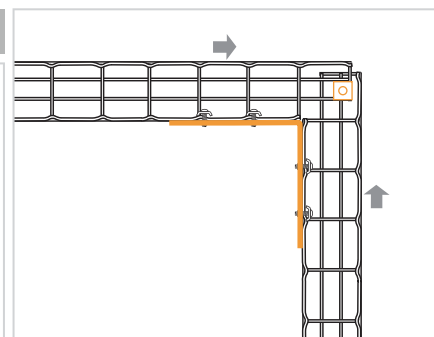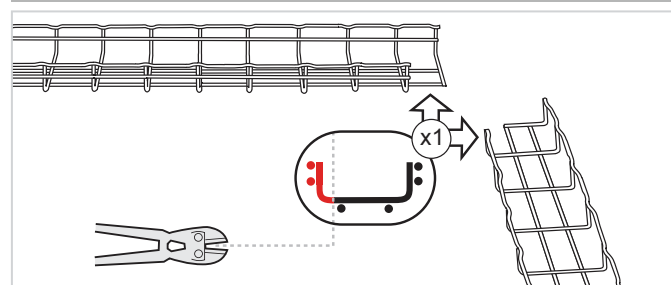

6" (150 mm)

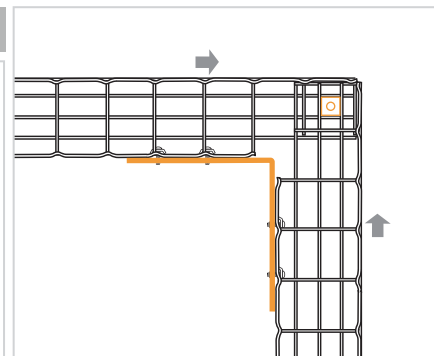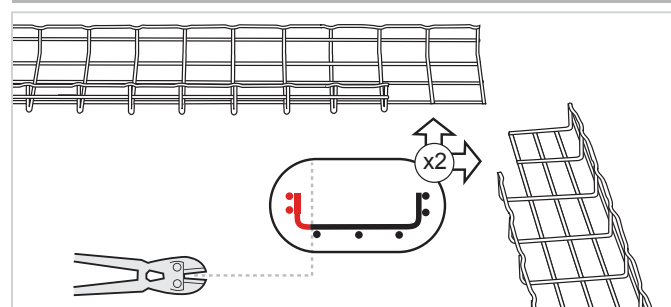

8" (200 mm)

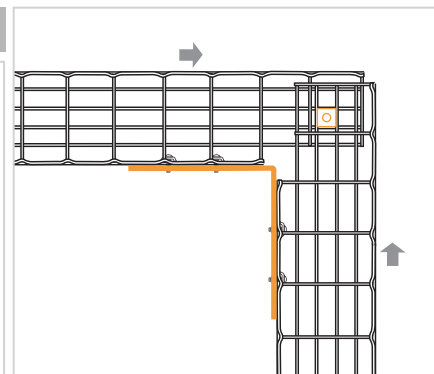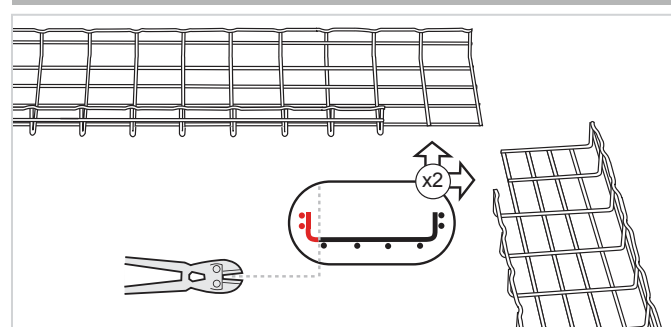

FABRICATIONS



90° JUNCTIONS





NEEDS





12" (300 mm)

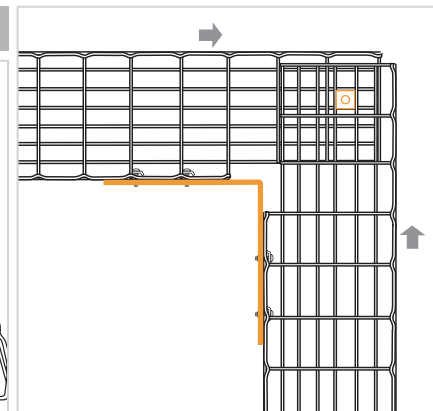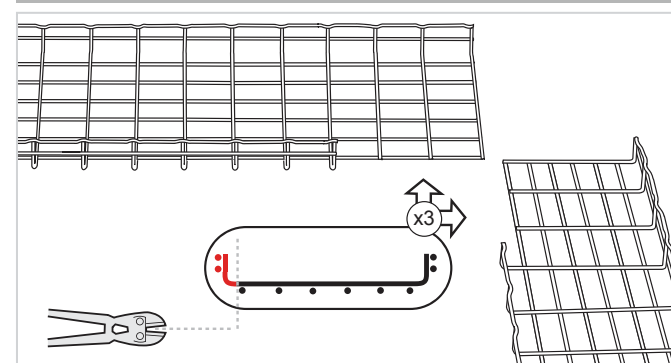

20" (500 mm)

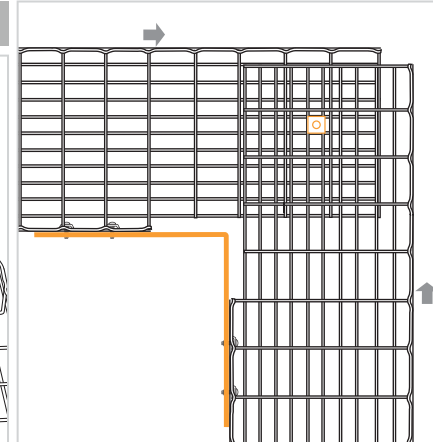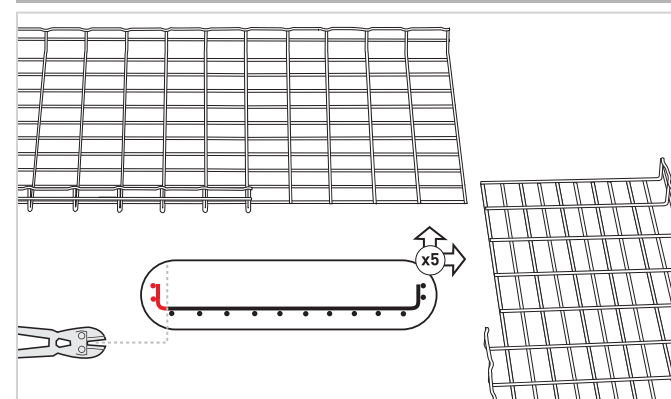

24" (600 mm)

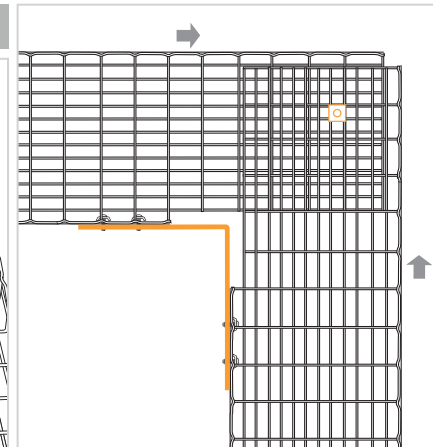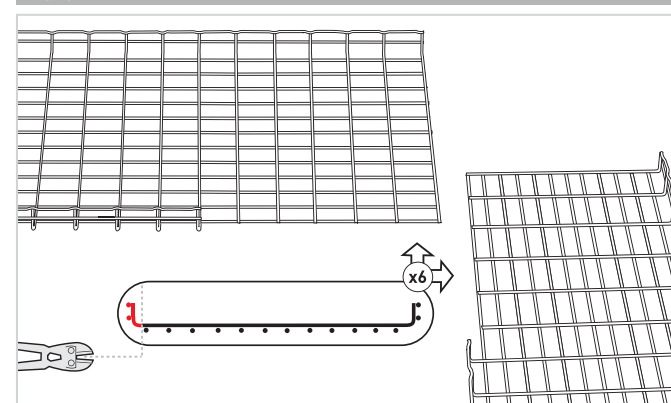



FABRICATIONS

SWEEPS





X1-X11



2" (50 mm)

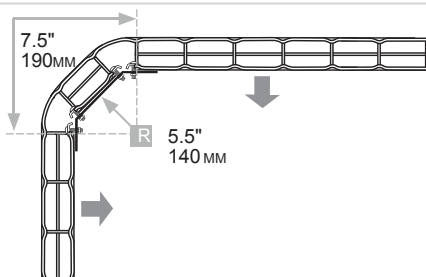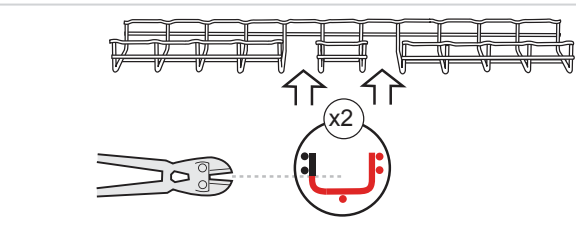



4" (100 mm)

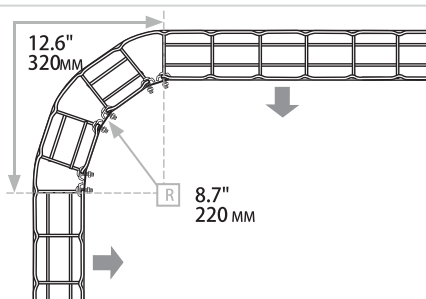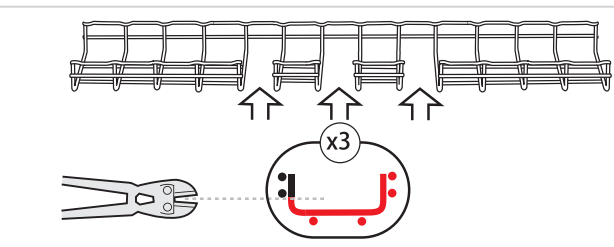

6" (150 mm)

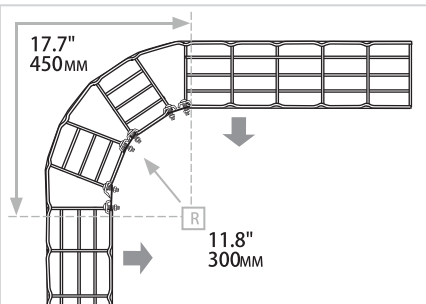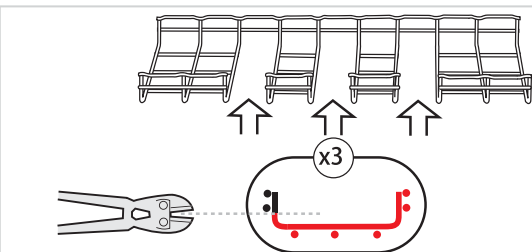

8" (200 mm)

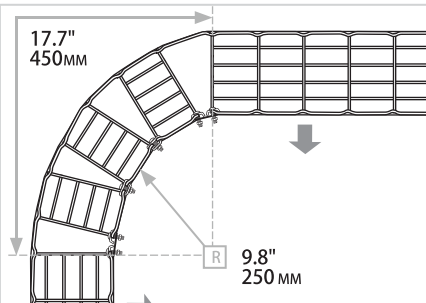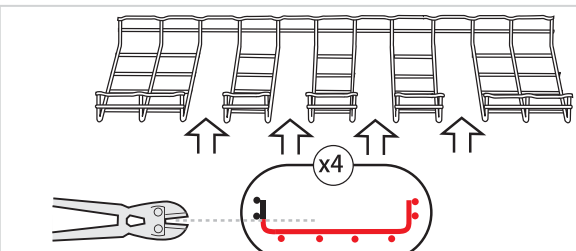



FABRICATIONS

SWEEPS





X1-X11



12" (300 mm)

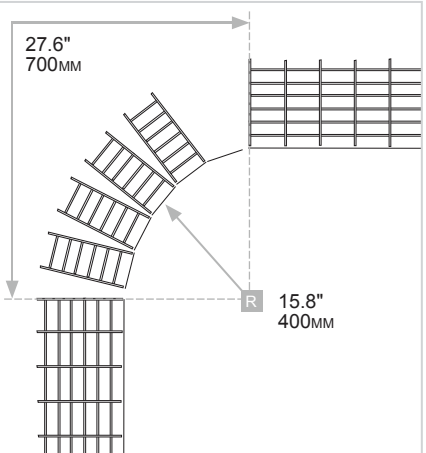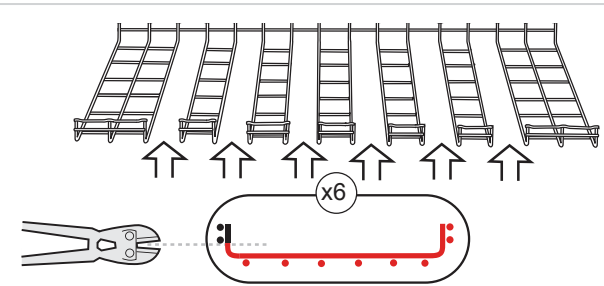

20" (500 mm)

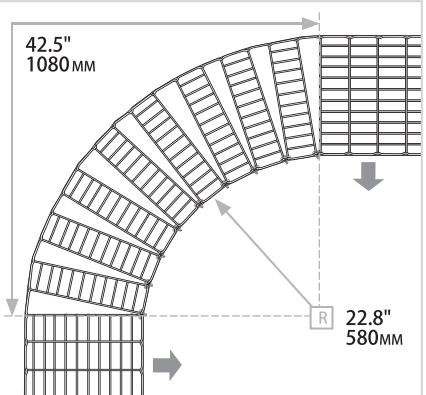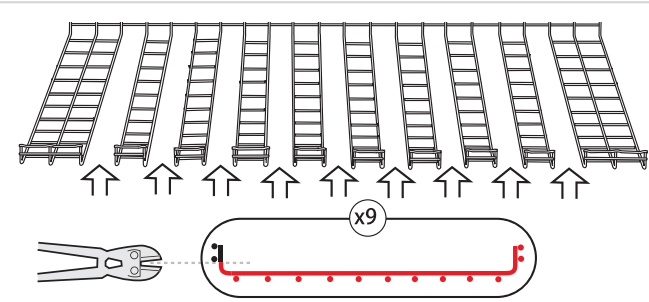


24" (600 mm)

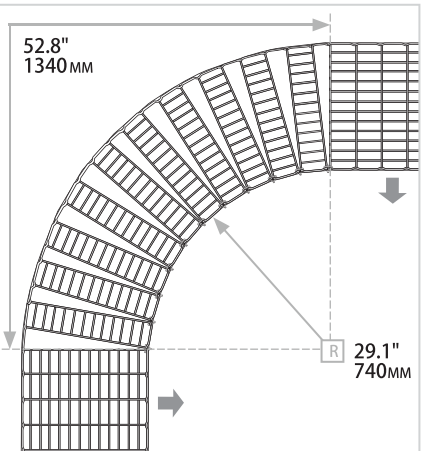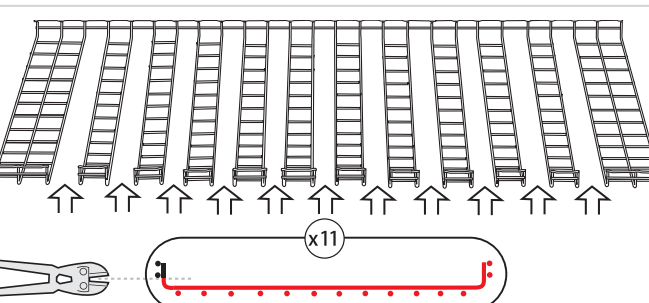

FABRICATIONS

REDUCTIONS

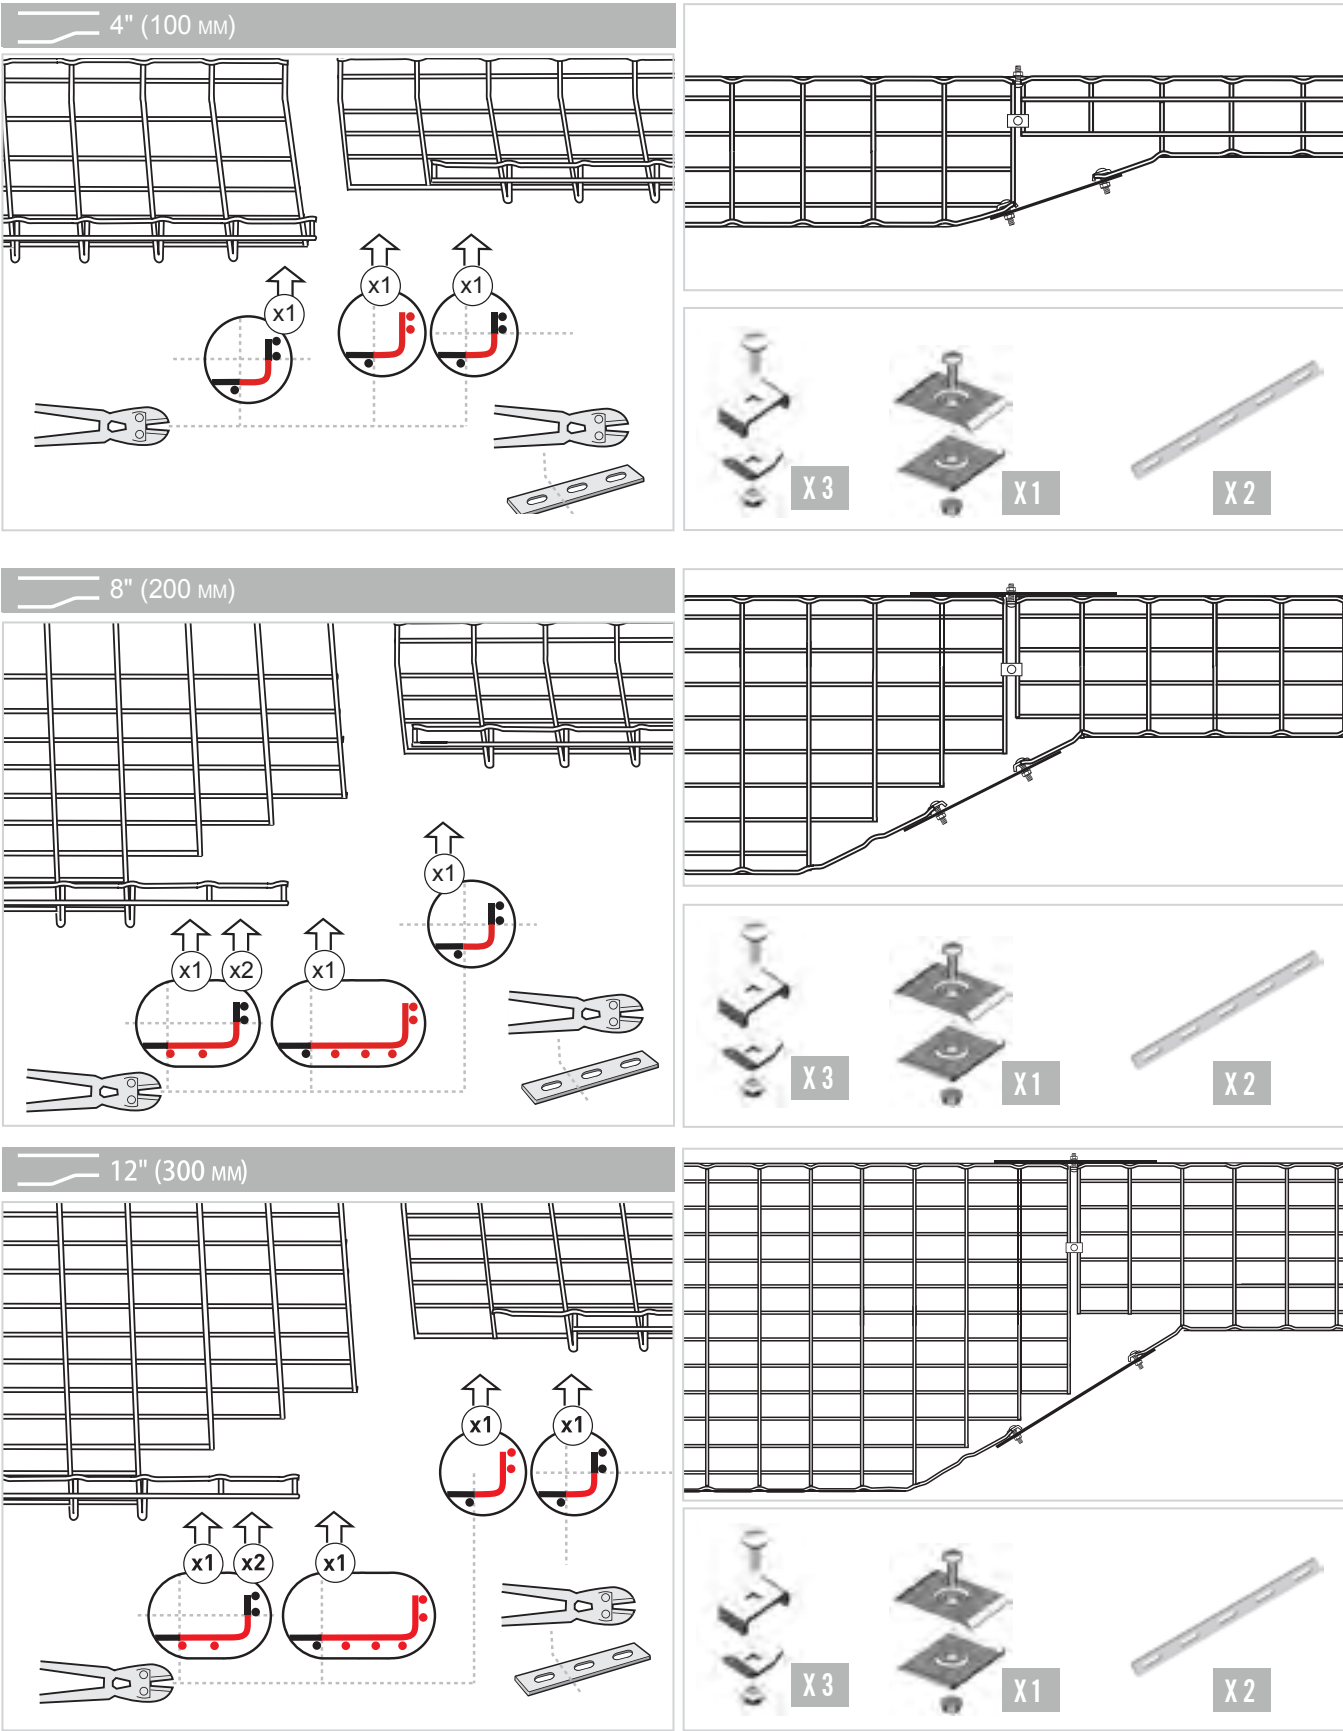

FABRICATIONS

90° JUNCTIONS

